NATIONAL TENT HOUSE

FOR SALES QUERIES:
national@cyber.net.pk
sales@nationaltenthouse.com
www.nationaltenthouse.com

HEAD OFFICE:
Plot no. 22, Sector 23,
Korangi Industrial Area, Karachi.
Tel: +92 21 38704021 - 26
Fax: +92 21 35870807

FACTORY DETAILS:
Karachi:
Plot no. 29, Sector 15,
Korangi Industrial Area, Karachi.
Tel: +92 21 38704021-26
Lahore:
Unit 1: 45-Km Ferozepur Road, Lahore.
Unit 2: 47-Km Ferozepur Road, Lahore.

Visit our Website

Follow us on X

Follow us on LinkedIn

Subscribe on Youtube

EST. 1957

NATIONAL TENT HOUSE

SERVING TO SAVE



www.nationaltenthouse.com

CONTENTS

01 INTRODUCTION

Our Approach Towards Sustainability 01
Our History & Purpose 03
Innovative Collaboration 04
Mission Statement, Mission & Vision 05
Factory Environment 07
Achievements 13

15 FAMILY TENTS

Family Tent (UNHCR Standard) 15
Family Tent (ICRC/IFRC Standard) 17
Self Standing Tent (UNHCR Standard) 19
Geodesic Tent (ICRC/IFRC Standard) 21
Family Frame Tent (UNHCR Standard) 23
Frame Tent (AFAD Standard) 25
Safari Tent 27
Family Round Tent 29
Double Fly Single Fold Tent 31
Double Fly Single Fold Family Ridge Tent 33
Double Fly Double Fold Tent (DFID Standard) 35
Deluxe Family Ridge Tent 37
Central Pole Tent 39
Winterized Tent - TRC Type 41
Winterized Tent - ARC Type 43
Sahara Tent 45
Kuwaiti Deluxe Tent 47
Single Pole Tent 49

51 MULTI PURPOSE TENTS

High Performance Tent (UNICEF Standard) 51
Multipurpose Tent (MSF/ICRC/IFRC/IOM Standard) 53
Heavy Duty (MSF/ICRC/IFRC/IOM Standard) 55
Dispensary Tent (ICRC Standard 27.5m²) 57
Educare Tent 59
School Tent (UNHCR Standard) 61
Marquee Tent 63

65 CORE RELIEF ITEMS

Winterization Kit (UNHCR/ICRC/IFRC Standard) 65
Cooking Stove (UNHCR/ICRC/IFRC Standard) 67
Blanket High Thermal (UNHCR/UNICEF) 69
Blanket High Thermal (ICRC/IOM) 71
Blanket Medium Thermal (UNHCR/UNICEF) 73
Blanket Medium Thermal (ICRC/IOM) 75
Jerry Can 10 L (UNHCR/UNICEF) 77
Jerry Can 10 L (ICRC/IFRC) 79
Kitchen Set (UNHCR Standard - Type B) 81
Blue Bucket (UNHCR/UNICEF Standard) 83
Green Bucket (OXFAM Standard) 85
Plastic Tarpaulin (ICRC/IFRC/IOM Standard 4 x 6 m) 87
Plastic Tarpaulin (UNHCR Standard 4 x 5 m) 89
Sleeping Mat 91
Shelter Tool Kit (IFRC Type) 93

CONTENTS

95 NON STANDARD ITEMS

Towel	95
Sleeping Bag	95
Mattress	95
Pillow	95
Steel Field Cod	95
Bunk Bed	96
Bed Linen	96
Quilt	96

OUR APPROACH TOWARDS SUSTAINABILITY

We have a strong conviction that incorporating sustainable business principles into our operations is not only environmentally responsible but also strategically advantageous. Our emphasis goes beyond seeking immediate profits; instead, we strive for enduring economic, social, and environmental benefits. We understand the need for a long-term perspective and unwavering supplier commitment in our industry. Our organization proactively tackles future challenges while addressing the ever-changing demands.

In order to showcase **our commitment towards green globe, we have developed eco-friendly products which are GRS and ISCC certified.** Further, to emphasize our commitment to ethical business practices, we align our goals with the Sustainable Development Goals (SDGs) and actively participate in community and charitable endeavors.

INNOVATING SUSTAINABILITY, ONE STEP AT A TIME.





OUR HISTORY

National Tent House was established in 1957 by the two brothers late Mohammad Ahmed and Anwar Ahmed for the manufacturing of Tents and Canvas products in Pakistan. In 1963, the company commenced exporting a range of products including tents, tarpaulins, truck covers, bags and canvas to countries in the Gulf and African region. Remarkably, it quickly rose to prominence as a market leader. In **1979**, the company embarked on a journey to explore new markets and achieved a **pivotal milestone by registering with the United Nations High Commissioner for Refugees (UNHCR) in Geneva as a supplier of tents and tarpaulins.** Since then, National Tent House has been dedicated to serving global humanitarian aid agencies, NGOs, governments, and private enterprises.

OUR PURPOSE

National Tent House is a purpose-driven enterprise dedicated to providing innovative, high-quality, and cost-effective solutions to humanitarian aid agencies. Over the span of 60 years, NTH has curated an impressive array of core relief products and essential aid supplies. Our product design, development, and supply are driven by a singular purpose: improving the lives of those impacted by disasters and conflicts. We prioritize the needs of our beneficiaries and actively contribute to the pursuit of sustainable development goals.

INNOVATIVE COLLABORATION

National Tent House takes pride in hosting an in-house product design team, specializing in value-engineering solutions for humanitarian partners. Our vision is to co-create new products in collaboration with our clients, driving innovation within our industry. We are trusted by leading UN agencies like UNHCR, UNICEF, ICRC/IFRC, AFAD,Save the Children, etc.

Our commitment to innovation continues with the introduction of **GRS certified** Fleece Blankets, **ISCC certified** Semi Collapsible Jerry Cans, Water buckets, **Fire Retardant** Tents and Tarpaulins, Multipurpose Tents for medical, educational purposes and other core relief items. All our products adhere rigorously to industry and quality standards, undergoing stringent quality checks throughout the production process.



MISSION STATEMENT

Providing **innovative, economical and eco-friendly** solutions to overcome humanitarian catastrophe.

MISSION

Our mission is to timely provide essential, **innovative, eco-friendly fit for purpose solutions** to humanitarian aid agencies. Through efficient logistics, strategic partnerships and a commitment to human dignity, we aim to alleviate suffering, promote resilience and restore hope in times of crisis.

VISION

To be at the forefront of every humanitarian crisis, insuring a safer tomorrow for human lives.

A COMMITMENT TOWARDS SUCCESS

We continuously engage with our clients, suppliers, and beneficiaries to design new solutions and enhance our existing product range. At National Tent House, we remain steadfast in our commitment to providing purposeful, sustainable, and innovative solutions that make a positive impact on the lives of those we serve.

FACTORY ENVIRONMENT

Our manufacturing facility is equipped with state of the art machinery which ensures quality and efficient supply of relief essentials to our clients. This is of particular importance when responding to humanitarian emergencies. When a conflict flares up or a natural disaster strikes, we are ready to respond.


















UNHCR


AOLITE












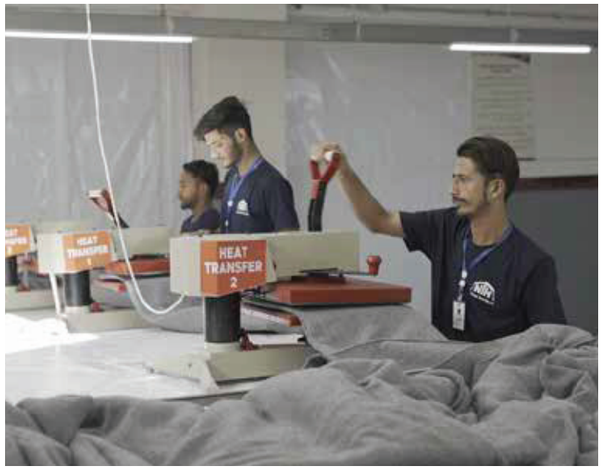


HEAT
TRANSFER
2







UNHCR



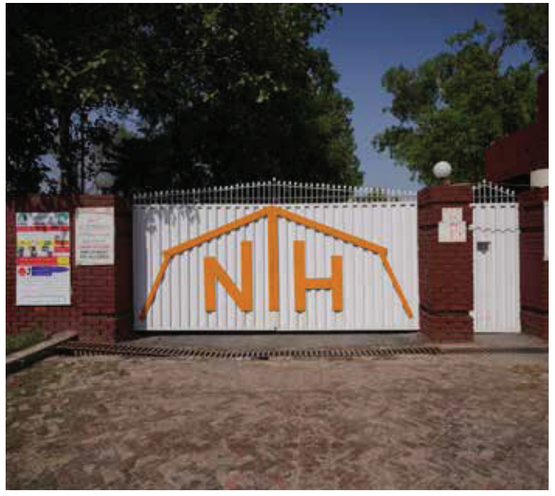


NH


UNHCR
The UN Refugee Agency



ACHIEVEMENTS

- No.1 Ranked Vendor in terms of purchase order value for UN in 2009.
- Export Merit Award for Tents, Blankets and Tents accessories.
- Ranked amongst the top 100 taxpayers of FBR in 2013.
- Export Merit Award for Relief Products.
- Appraised by UNHCR for “outstanding delivery service and packaging” in 2022.
- Had the honor to serve “Prime Minister Office” during Pakistan’s flash flooding in 2022.

Our commitment to innovation continues with the introduction of **GRS certified** Fleece Blankets, **ISCC certified** Semi Collapsible Jerry Cans, Water buckets, **Fire Retardant** Tents and Tarpaulins, Multipurpose Tents for medical, educational purposes and other core relief items. All our products adhere rigorously to industry and quality standards, undergoing stringent quality checks throughout the production process.

NATIONAL TENT HOUSE

FAMILY TENT (UNHCR STANDARD)





FAMILY TENT
UNHCR STANDARD


Dimensions	
Total Living Area	23 m²
Main Floor	16 m²
Two Vestibule Area	3.5 m² x 2= 7 m²
Centre Height	2.20 m
Centre Width	4.00 m
Ridge Length	4.00 m
Side Wall Height	1.25 m
Centre Base Length	6.60 m
Windows	2 (3.6 x 0.30 m)
Ventilation	2 (0.25 x 0.30 m)

Tent Doors	
Total Size	1.30 x 1.40 m
Door Flap	1.40 x 1.60 m
Upper Part	1.40 X 0.90 m (PC)
Lower Part	1.40 x 0.70 m (PE)

Poles and Accessories	
2 Upright Poles	2.20 m
1 Centre Upright Pole	2.17 m
6 Side Poles	1.25 m
4 Door Poles	1.40 m
Pegs	10
Pins	26
Hammer	1

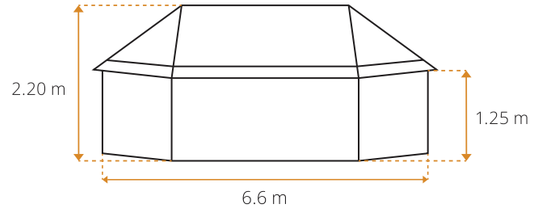

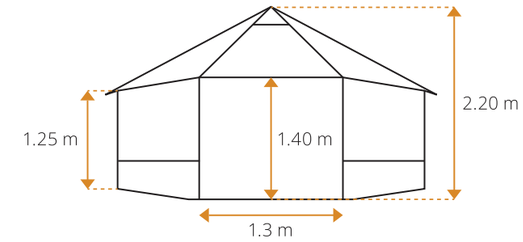

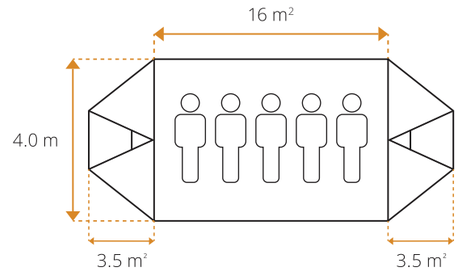

SUITABLE FOR A FAMILY OF 5

*Based on minimum living area in hot & temperature climates (3.5m² per person), providing extra space for cold climates.

MATERIAL DETAILS - FR

OUTER TENT
Roof 350 gsm Polycotton, natural white (±15%) – Fire Retardant, UV, Rot and Water Resistant
Sidewall 275 gsm Polycotton, natural white (±10%) – Fire Retardant, UV, Rot and Water Resistant

INNER TENT 160 gsm Polycotton, Natural White (±10%) – Fire Retardant, UV and Rot Resistant

MUDFLAPS 190 gsm Polyethylene (HDPE) (±30 grams)

GROUNDSHEET: 190 gsm Polyethylene (HDPE), sewn in bathtub style (±30 grams)

PACKING Each complete in a PE bag

CONTAINER LOADABILITY

Caged Packing
(15 Tents per Cage)
20FT: 150 Tents/10 Cages
40DC: 300 Tents/20 Cages
40FT HC: 300 Tents/20 Cages

Non-Caged
20FT: 140 Tents
40DC: 320 Tents
40FT HC: 360 Tents

5-YEARS SHELF LIFE
DRY, CLEAN & VENTILATED WAREHOUSE

62kg	0.27m³	2.25 x 0.35 x 0.35 m
Tent Packed Weight (±3%)	Tent Packed Volume (±3%)	Packed Dimensions (±3%)

Can stand the pressure of 75 Km/h wind

EN 13823 & CPAI84 FIRE RETARDANT · WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE

FAMILY TENT (ICRC/IFRC)



CONTAINER LOADABILITY


Caged Packing (15 Tents per Cage)	Non-Caged
20FT: 150 Tents/10 Cages	**20FT:** 190 Tents
40DC: 300 Tents/20 Cages	**40DC:** 350 Tents
40FT HC: 300 Tents/20 Cages	**40FT HC:** 400 Tents


5-YEARS SHELF LIFE
DRY, CLEAN & VENTILATED WAREHOUSE


55 kg	0.27m³	2.25 x 0.32 x 0.32 m
Tent Packed Weight (±3%)	Tent Packed Volume (±3%)	Packed Dimensions (±3%)

FAMILY TENT
ICRC/IFRC STANDARD

Dimensions	
Total Living Area	23 m²
Main Floor	16 m²
Two Vestibule Area	3.5 m² x 2= 7 m²
Centre Height	2.20 m
Centre Width	4.00 m
Ridge Length	4.00 m
Side Wall Height	1.25 m
Centre Base Length	6.60 m
Windows	2 (3.6 x 0.60 m)
Ventilation	2 (0.35 x 0.40 m)
Tent Doors	
Total Size	1.30 x 1.40 m
Door Flap	1.40 x 1.60 m
Upper Part	1.40 X 0.90 m (PC)
Lower Part	1.40 x 0.70 m (PE)
Poles and Accessories	
2 Upright Poles	2.20 m
1 Centre Upright Pole	2.17 m
6 Side Poles	1.25 m
4 Door Poles	1.40 m
Pegs	10
Pins	26
Hammer	1

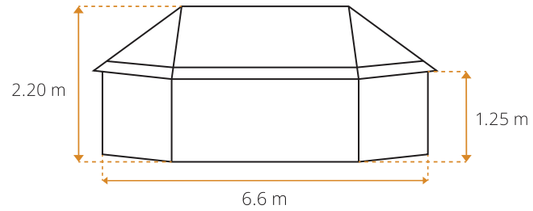

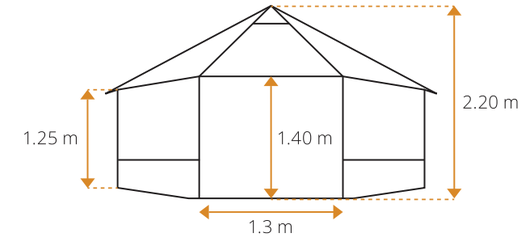

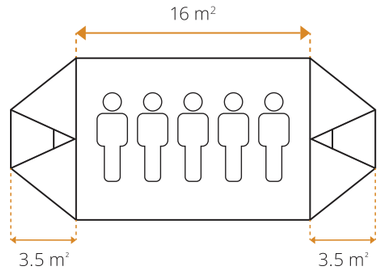

SUITABLE FOR A FAMILY OF 5

*Based on minimum living area in hot & temperature climates (3.5m² per person), providing extra space for cold climates.

MATERIAL DETAILS

OUTER TENT	
Roof	350 gsm Polycotton, natural white (±15%) – UV, Rot and Water Resistant
Sidewall	200 gsm Polycotton, natural white (±10%) - UV, Rot and Water Resistant
INNER TENT	130 gsm Polycotton, Natural White (±10%) – UV, Rot and Water Resistant
MUDFLAPS	190 gsm Polyethylene (HDPE) (±20 grams)
GROUNDSHEET	190 gsm Polyethylene (HDPE), sewn in bathtub style (±20 grams)
PACKING	Each complete in a PE bag

Can stand the pressure of 75 Km/h wind

WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE


SELF STANDING TENT (UNHCR STANDARD)



SELF STANDING TENT
UNHCR STANDARD

Dimensions	
Total Living Area	18.5 m^2
Length	4.30 m
Width	4.30 m
Centre height	2.40 m
Entrance Wall Height	1.90 m
Door height	1.70 m
Windows:	2 (0.75 x 0.70 m)

Ventilation: 4 adjustable ventilation windows on side walls & 4 adjustable ventilation grades on roof top

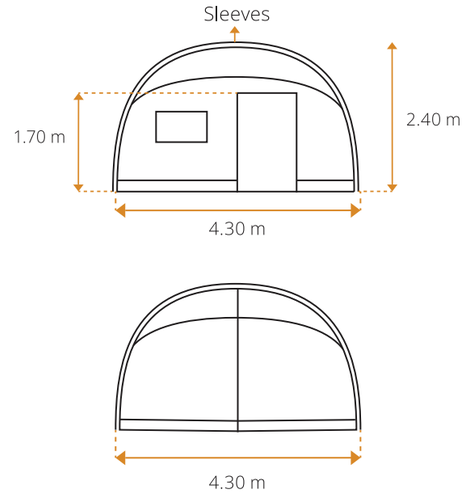

SUITABLE FOR A FAMILY OF 5

MATERIAL DETAILS - FR

MAIN TENT - (Roof, Walls, Mudflaps, Ground Sheet and Shade net Reinforcement Strips)

Composition	Woven high-density polyethylene black fibre farbic laminated on both sides with low-density polyethylene coating
Fire Retardancy	EN 13823, +A1 and CPAI84
Weight	190 ±(10%) g/m^2

INNER TENT (Doors, Window shutters, Ventilation shutters, Partition)

Composition	Polyester/cotton blended fibre yarns. Cotton: 40% (±10%), polyester: 60% (±10%) = polyester: 50% to 70%, balance cotton or cotton 100%
Fire Retardancy	CPAI84
Weight	150 gsm (±15%)

MOSQUITO NET (Doors, Windows, Ventilation)

Composition	100% polyester
Weight	85-100 g/m^2

SHADE NET

Composition	High-density polyethylene (HDPE), warp knitted
Weight	190 gsm (±10%)
Color	Dark Blue, shade rate 80%

TENT FRAMES & ACCESSORIES

Aluminum	7001-T6, 19 mm outer diameter, 1.2 mm wall thickness, colour coded anodized
Pegs	14 J-Type - 30 cm 6 T-Type - 40 cm
Hammer	1

PACKING Each complete in a PE bag

FEATURES

- Easy setup (requires 3 individuals to setup)
- Made of PE fabric making it lightweight and strong
- Adaptable to all climates, advanced ventilation
- 3 Layers: Outer tent, pre fitted inner tent and shade net

CONTAINER LOADABILITY

Palletized (4 Tents per Pallet)	Non-Palletized
20FT: 96 Tents	**20FT:** 150 Tents
40DC: 240 Tents	**40DC:** 312 Tents
40FT HC: 240 Tents	**40FT HC:** 364 Tents

5-YEARS SHELF LIFE
DRY, CLEAN & VENTILATED WAREHOUSE

52 Kg	0.285m^3	1.15 x 5.5 x 4.5 m
Tent Packed Weight (±3%)	Tent Packed Volume (±3%)	Packed Dimensions (±3%)

Can stand the pressure of 75 Km/h wind

CPAI84 FIRE RETARDANT · WATERPROOF · ANTI-ROT · UV PROTECTION · LIGHT WEIGHT

NATIONAL TENT HOUSE


GEODESIC TENT (ICRC/IFRC STANDARD)




GEODESIC TENT
ICRC/IFRC STANDARD

Dimensions	
Length	5.58 m
Width	4.33 m
Centre height	2.40 m
Total Living Area	18.4 m²
Door height	1.80 m
Door width	0.9 m
Windows:	6 (500 mm x 500 mm)

Ventilation: 2 Ventilations at the top of tent roof

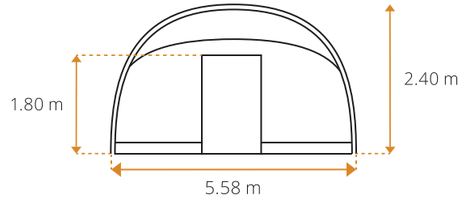



SUITABLE FOR A FAMILY OF 5

MATERIAL DETAILS - FR

OUTER TENT (Roof, Walls, Mudflaps, Partition, Groundsheets)

Composition	Woven high-density polyethylene (HDPE) black fibres
Coating	White low density polyethylene (LDPE) on both sides
Weight	190 gsm (±20 grams)
Fire Retardancy	EN13823+AI

MOSQUITO NETS

Composition	100% polyester
Outer Mesh Size	7-9 holes per cm²
Inner Mesh Size	20-25 holes per cm²

TENT FRAMES & ACCESSORIES

Aluminium	(6061-T6)
Main Pipes	Outer diameter 19 mm (±0.5 mm), thickness 1.2 mm (±1%)
Pegs	10 J-Type - 20 cm 6 T-Type - 40 cm
Hammer	1

ADDONS (Optional)

INNER LINER

Composition	100% Polyester Fabric
Weight	110 gsm (±15%)

WINTERIZATION KIT	Constructed using a dual layer of 110 g/m² polycotton fabric, enhanced with 80 g/m² polyester wadding insulation, and featuring a 180 g/m² grey PE groundsheet. It also includes an extra ground sheet
PACKING	Each complete in a PE bag

FEATURES

- Easy setup (requires 3 individuals to setup)
- Made of PE fabric making it lightweight and strong
- Winterization Kit also available on client request
- 2 Layers: Outer tent and shade cover

CONTAINER LOADABILITY

Palletized (4 Pieces per Pallet)	Non-Palletized
20FT: 112 Tents	**20FT:** 150 Tents
40DC: 240 Tents	**40DC:** 320 Tents
40FT HC: 240 Tents	**40FT HC:** 384 Tents

*Caged packaging can be done as per client's request

5-YEARS SHELF LIFE
DRY, CLEAN & VENTILATED WAREHOUSE

45 Kg	0.184m³	1.15 x 4.0 x 4.0 m
Tent Packed Weight (±3%)	Tent Packed Volume (±3%)	Packed Dimensions (±3%)

Can stand the pressure of 100 Km/h wind

EN13823+AI FIRE RETARDANT · WATERPROOF · ANTI-ROT · UV PROTECTION · LIGHT WEIGHT

NATIONAL TENT HOUSE

FAMILY FRAME TENT



FAMILY FRAME TENT
UNHCR STANDARD

Dimensions	Outer	Inner
Total Living Area	19.50 m^2	
Center Base Length	5.2 m	
Length	4.0 m	3.8 m
Width	4.15 m	3.8 m
Central Height	2.4 m	2.3 m
Wall Height	1.5 m	1.45 m
No of Vestubles	1	
Ventilator	2	

Front Doors	
Total Size	1.5 X 1.6 m
Door Flap	1.5 X 1.6 m
Upper Part	1.6 X 1.08 m (made of PC)
Lower Part	1.0 X 0.52 m (made of PE)

Rear Doors	
Total Size	1.0 X 2.1 m
Door Flap	1.0 X 2.1 m
Upper Part	1.0 X 1.58 m (made of PC)
Lower Part	1.5 X 0.52 m (made of PE)

MATERIAL DETAILS - FR


OUTER TENT
Composition Poly-Cotton blended fiber yarns - Fire Retardant, UV, Rot and Water Resistant
Weight 350 gsm (±5%)
Color Natural White, not dyed

INNER TENT
Composition Polyester and cotton blended fibres yarns Cotton: 40% (±10), polyester: 60% (±10) - UV, Rot and Water Resistant
Weight 170 gsm (±10%)
Color Dyed Cream or Beige color

MUD FLAPS AND GROUND SHEETS
Composition Woven polyethylene fabric, coated on both sides with low density polyethylene
Weight 190 gsm (±30 grams)

FRAME AND ACCESSORIES
Poles Made of Steel **Pegs** 11
Connectors Made of Steel **Pins** 16

PACKING Each complete in a PE bag

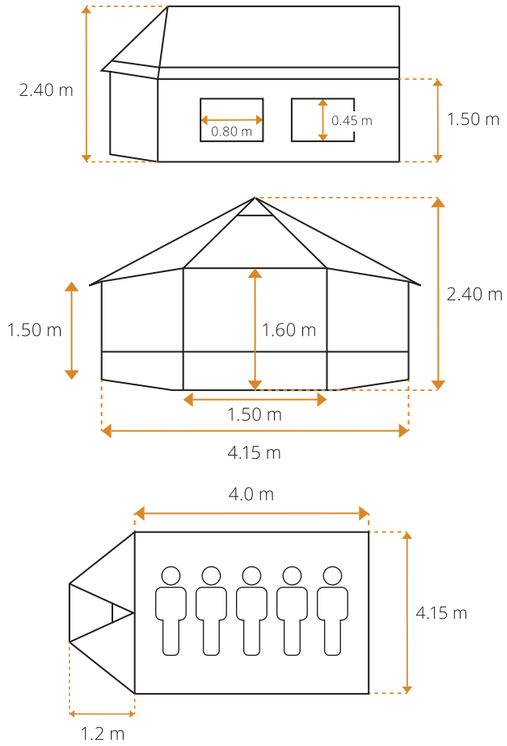

SUITABLE FOR A FAMILY OF 5

FEATURES

- 2 Ventilation openings
- Simple to install and assemble with minimal space requirements
- Symmetrical flaps makes it feasible to connect two tents in order to achieve bigger inner space

CONTAINER LOADABILITY

Caged Packing
(9 Tents per Cage)
20FT: 90 Tents/10 Cages
40DC: 180 Tents/20 Cages
40FT HC: 180 Tents/20 Cages

Non-Palletized
20FT: 80 Tents
40DC: 160 Tents
40FT HC: 190 Tents

5-YEARS SHELF LIFE
DRY, CLEAN & VENTILATED WAREHOUSE

87kg	0.35m^3	2.2 X 4.0 X 4.0 m
Tent Packed Weight (±3%)	Tent Packed Volume (±3%)	Packed Dimensions (±3%)

Can stand the pressure of 75 Km/h wind

EN 13823 & CPA184 FIRE RETARDANT · WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE

FRAME TENT (AFAD STANDARD)



FRAME TENT
AFAD STANDARD

Dimensions	Outer	Inner
Total Living Area	16 m^2	
Length	4.10 m	2.75 m
Width	4.05 m	3.85 m
Central Height	2.55 m	2.35 m
Wall Height	1.93 m	1.73 m
Door Height	2.00 m	1.80 m
Windows	3	
Doors	2	

Poles and Accessories	
Frame	42 mm
Poles	12 made of Aluminium
Sockets	9 made of Steel
T Pegs	10 made of Steel
Nail Pegs	6 made of Steel
Hammer	1 made of Iron

MATERIAL DETAILS - FR

OUTER TENT


ROOF
Composition PVC Sheet
Weight 450 gsm (±10%)
Color Grey


SIDEWALL
Composition 100% Cotton - Fire Retardant, Water, UV and Rot Proof
Weight 530 gsm (±10%)
Color Natural color


INNER TENT
Composition Made of 100% Polyester Felt
Weight 350 gsm
Color Natural color

GROUND SHEET
Composition Made of Felt and PVC
Weight 450 gsm (±10%) Stitched in Bath Tub Style
Color Grey color

PACKING Each complete Tent packed with poles and accessories in a PVC bag

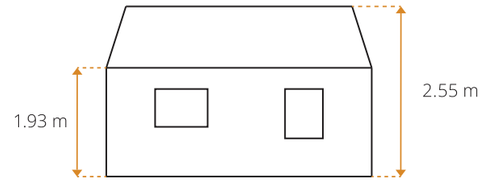

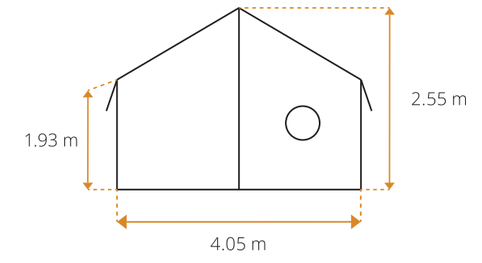



SUITABLE FOR A FAMILY OF 6

CONTAINER LOADABILITY
Palletized
(20 Pieces per Pallet)
20FT: 2 Pallets/40 Tents
40DC: 5 Pallets/100 Tents

82 Kg	0.48m³	2.10 x 0.45 x 0.5 m
Tent Packed Weight (±5%)	Tent Packed Volume (±5%)	Packed Dimensions (±5%)

CPAI84 FIRE RETARDANT · WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE

SAFARI TENT




SAFARI TENT


Dimensions	
Total Living Area	16 m²
Length	4.0 m
Width	4.0 m
Central Height	2.30 m
Wall Height	1.80 m
Door (W x H)	2 (1.0 x 1.6 m)
Windows	6
Ventilators	2


Poles and Accessories	
Frame	25 mm Steel
Poles	12 made of Aluminium
Sockets	9 made of Steel
Pins	14 made of Steel
Pegs	6 made of Steel
Hammer	1 made of Iron

MATERIAL DETAILS

TENT FABRIC	
ROOF	
Composition	Poly cotton - Water, UV and Rot proof
Weight	200 gsm (±10%)
SIDEWALL	
Composition	Poly cotton - Water, UV and Rot proof
Weight	200 gsm (±10%)
Ground Sheet:	190 gsm (±10%) stitched in bath tub style
Fly Sheet:	180 gsm (±5%) polyethylene (HDPE)
PACKAGING	Each complete tent packed with poles and accessories in a wooden box

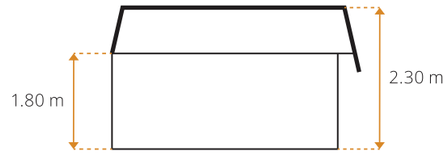

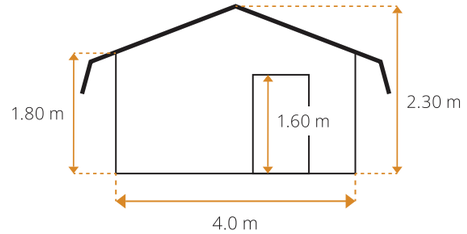

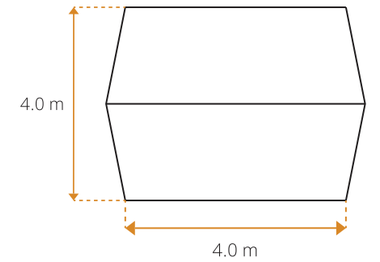

CONTAINER LOADABILITY

Non-Palletized
20FT: 80 Tents
40DC: 160 Tents
40FT HC: 190 Tents

80 KG	0.30 m³	2.25 x 0.4 x 0.4 m
Weight of Tent Bundle (±5%)	Volume (±5%)	Packed Dimensions (±5%)

***OPTIONAL**

CPAI84 FIRE RETARDANT · WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE

FAMILY ROUND TENT



FAMILY ROUND TENT

Dimensions	
Size	4.0 m Diameter
Central Height	2.40 m
Sidewall Height	0.6 m
Doors	1
Window	2 (0.4 x 0.2 m)
Ventilation	2


Poles and Accessories	
Poles	2
Pegs	10
Pins	12
Hammer	1


MATERIAL DETAILS


FABRIC	Made of single layer Poly cotton - Water and Rot proof
Colors:	Natural Colour or can be customized as per the requirements
Weight:	325 gsm
ADDONS (Optional)	Flysheet
PACKAGING	Each tent is packed in cartons or bundles

FEATURES

- Easy to assemble
- Requires only 4-5 people to setup

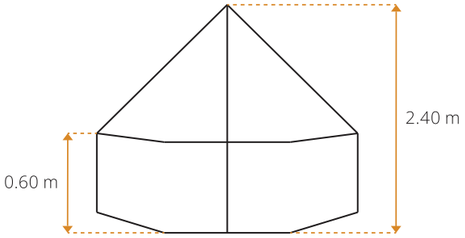





SUITABLE FOR A FAMILY OF 5

WATERPROOF ANTI-ROT UV PROTECTION

NATIONAL TENT HOUSE

DOUBLE FLY SINGLE FOLD TENT



DOUBLE FLY SINGLE FOLD TENT


WITH BATHTUB STYLE GROUNDSHEET


Dimensions	
Total Living Area	19.25 m²
Length	5.50 m
Width	3.50 m
Height	2.00 m
Wall Height	1.00 m
Window	4 (0.6 x 0.4 m)
Door	2 (1 x 2 m)


Poles and Accessories	
Standing Poles	3
Ridge Poles	2
Pins	14
Pegs	12
Hammer/Mallet	1

MATERIAL DETAILS

TENT:	
Composition:	Single-layer 100% Cotton or Poly-Cotton - UV, Water, and Rot proof canvas
Weight:	300, 400, and 450 gsm (±5%) *Can be customized as per client requirements
GROUND SHEET	Sewn in tub-style
Weight	140 or 180 gsm, PE-Laminated fabric
ADDONS (Optional)	Fly Sheet
PACKING	Each complete in a canvas bag



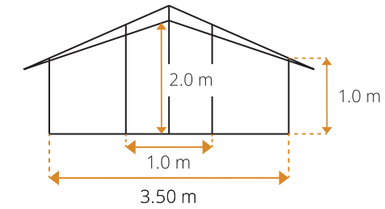



SUITABLE FOR A FAMILY OF 5 - 8

FEATURES

- Easy to assemble
- Requires only 3-4 people to setup
- Bath tub style ground sheet protects water from entering the tent

CONTAINER LOADABILITY

Non-Palletized

20FT: 200 Tents

40DC: 400 Tents

40FT HC: 420 Tents

50 Kg	0.19m³	2.18 x 0.3 x 0.3 m
Tent Packed Weight (±5%)	Tent Packed Volume (±5%)	Packed Dimensions (±5%)

WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE


DOUBLE FLY SINGLE FOLD FAMILY RIDGE





DOUBLE FLY SINGLE FOLD FAMILY RIDGE TENT

Dimensions	
Total Living Area	16 m² or 12 m²
Length	4.0 m
Width	4.0 m
Length (Optional)	4.0 m
Width (Optional)	3.0 m
Central Height	2.15 m
Wall Height	1.0 m
Window	2 (0.6 x 0.4 m)
Door	2

Poles and Accessories	
Ridge Poles	1
Standing Poles	2
Sidewall Polls	12
Pegs	12
Pins	12
Hammer	1

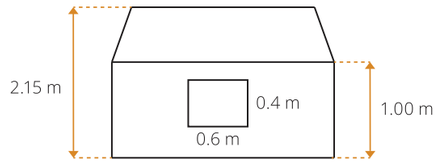

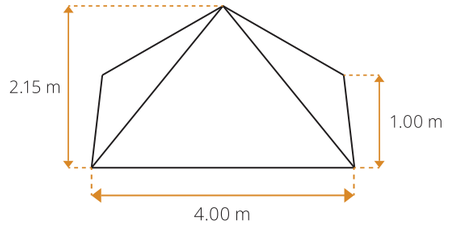



SUITABLE FOR A FAMILY OF 6

MATERIAL DETAILS

OUTER TENT	
Composition	100% Cotton or Poly-Cotton - Water, UV and Rot proof
Weight	300, 400, 450 gsm *Can be customized as per client requirement
INNER TENT	
Composition	100% Cotton or Poly Cotton- Water, UV and Rot Proof
Weight	300, 400, 450 gsm Can be customized as per client requirements
ADDONS	• Ground sheet • Mudflap • Fly Sheet
PACKING	Each complete in a canvas bag

FEATURES

- Easy to assemble
- Requires only 3 people to setup
- 2 Layers can provide privacy and ventilation for the families at the same time

CONTAINER LOADABILITY
Non-Palletized
20FT: 200 Tents
40DC: 400 Tents
40FT HC: 420 Tents

45 Kg	0.19m³	2.15 x 0.28 x 0.28 m
Tent Packed Weight (±5%)	Tent Packed Volume (±5%)	Packed Dimensions (±5%)

WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE

DOUBLE FLY DOUBLE FOLD (DFID STANDARD)





DOUBLE FLY DOUBLE FOLD RIDGE TENT

DFID STANDARD

Dimensions	
Total Living Area	16 m²
Length	4.00
Width	4.00 m
Central Height	2.15 m
Wall Height	0.90 m
Window	4 (with flap) (0.6 x 0.4 m)
Door	2


Poles and Accessories	
Ridge Poles	2
Poles	3
Pegs	14
Pins	12
Mallets	1

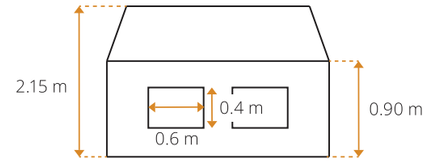

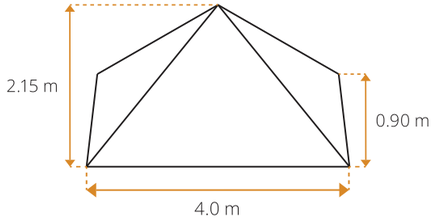

MATERIAL DETAILS

OUTER TENT	
Composition	Made of single layer 100% Cotton or Poly-cotton - Water, UV and Rot Proof
Weight	300, 400, 450 gsm *Can be customzied as per client's requirements
INNER ROOF	Made of two layers
Layer 1	
Composition	Poly-Cotton, Water, UV and Rot proof canvas Dyed Cotton Sheeting Cloth
Weight	300, 400, 450 gsm
Layer 2	
Composition	Dyed Cotton Sheeting Cloth
Weight	300, 400, 450 gsm *Can be customized as per client's requirements
ADDONS (Optional)	• Ground sheet • Mud Flop • Fly Sheet



SUITABLE FOR FAMILY OF 5

FEATURES

- Easy to assemble
- Requires only 3 people to setup
- 2 Layers can provide privacy and ventilation for the families at the same time

CONTAINER LOADABILITY

Non-Palletized

20FT: 200 Tents
40DC: 400 Tents
40FT HC: 420 Tents

48 Kg	0.19m³	2.15 x 0.3 x 0.3 m
Tent Packed Weight (±5%)	Tent Packed Volume (±5%)	Packed Dimensions (±5%)

***OPTIONAL**

CPAI84 FIRE RETARDANT | WATERPROOF | ANTI-ROT | UV PROTECTION

NATIONAL TENT HOUSE

DELUXE FAMILY RIDGE TENT




DELUXE FAMILY RIDGE TENT


Dimensions	
Total Living Area	16 m²
Length	4.0 m
Width	4.0 m
Central Height	3.0 m
Side Wall Height	1.50 m
Windows	2 (0.60 x 0.40 m)
Doors	1
Ventilation	2 (0.15 x 0.20 x 0.75 m)


Poles and Accessories	
Ridge Pole	1
Standing Poles	2
Side Poles	8
Pegs	10 made of Iron
Pins	10 made of Iron
Hammer	1 made of Iron

MATERIAL DETAILS

TENT	
Composition	Made of single layer of Poly-cotton canvas
Color	Natural color
Weight	350, 400 or 450 gsm *Can be customized as per client requirement
PACKING	Each tent is packed in canvas bag

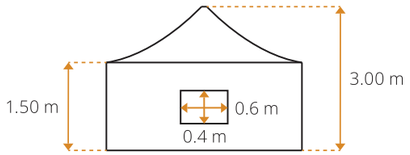

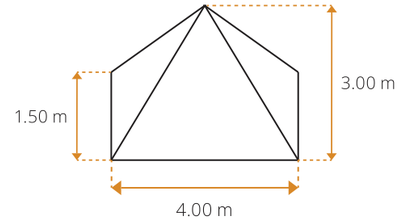



SUITABLE FOR A FAMILY OF 5 - 6

FEATURES

- Easy to assemble
- Requires only 3-4 people to setup

WATERPROOF ANTI-ROT UV PROTECTION

NATIONAL TENT HOUSE


CENTRAL POLE TENT





CENTRAL POLE TENT

Dimensions	
Total Living Area	16 m²
Length	4.00 m
Width	4.00 m
Central Height	3.00 m
Side Wall Height	1.80 m
Windows	2 (0.6 x 0.4 m)
Doors	2

Poles and Accessories:	
Poles	1
Side/Canopy/Door Poles	12 + 4 + 2
Pegs	12 made of Iron
Pins	12 made of Iron
Hammer	1 made of Iron

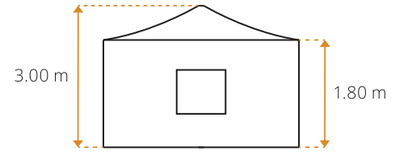

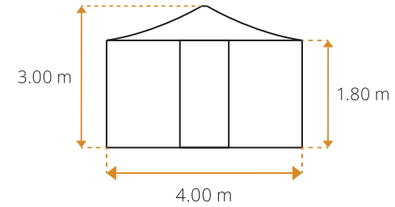



MATERIAL DETAILS

OUTER TENT	
Composition	Made of single layer of Poly-cotton canvas - Water and UV Proof
Weight	350, 400 or 450 gsm *Can be customized as per client requirement
INNER TENT	Made of two layers
Layer 01	
Composition:	Poly-cotton canvas - Water and UV Proof
Weight:	450 gsm approx.
Layer 02	
Composition:	Dusooti Cloth
Weight:	160 gsm approx.
PACKAGING	Each tent is packed in canvas bag

SUITABLE FOR A FAMILY OF 5 - 6

WATERPROOF ANTI-ROT UV PROTECTION

NATIONAL TENT HOUSE

WINTERIZED TENT - TRC



WINTERIZED TENT


TRC TYPE


Dimensions	Outer	Inner
Length	4.20 m	4.00 m
Width	4.20 m	4.00 m
Central Height	3.00 m	2.70 m
Sidewall Height	1.50 m	
Door Height	1.80 m	
Window	2 (0.6 x 0.4 m)	
Ventilation	2	
Apron	1 for flue pipe	


Poles and Accessories:	
Poles	13
Pegs	12 made of Iron
Pins	12 made of Iron
Hammer	1 made of Iron

MATERIAL DETAILS

OUTER TENT	
Fabric	Made of single layer Poly cotton - Water and Rot proof
Color	Natural Color or can be customized as per the requirements
Weight	450 gsm approx. *Can be customized as per client requirement
INNER TENT	
Fabric	Made of single layer Poly-cotton - Water and Rot proof
Color	Natural Color or can be customized as per the requirements
Weight	300 gsm approx. *Can be customized as per client requirement
PACKAGING	Each tent is packed in a canvas bag

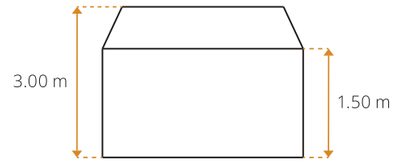

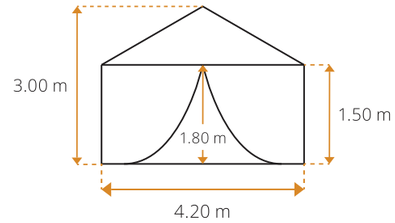



SUITABLE FOR A FAMILY OF 5-6

FEATURES

- Easy to assemble
- Requires only 4-5 people to setup

WATERPROOF

ANTI-ROT

NATIONAL TENT HOUSE

WINTERIZED TENT - ARC




WINTERIZED TENT
ARC TYPE


Dimensions	Outer	Inner
Length	4.10 m	4.05 m
Width	4.10 m	4.05 m
Central Height	3.40m	2.50 m
Sidewall Height	1.55 m	1.50 m
Door	1	
Door Height	2.0 m	
Window	2 (0.6 x 0.4 m)	
Ventilation	2	
Appron	1 for flue pipe	


Poles and Accessories:	
Poles	12
Pegs	11 made of Iron
Pins	12 made of Iron
Hammer	1 made of Iron

MATERIAL DETAILS

OUTER TENT	
Fabric	Made of single layer Poly cotton - Water and Rot proof
Color	Natural Color or can be customized as per the requirements
Weight	600 gsm approx. *Can be customized as per client requirement
INNER TENT	
Fabric	Made of single layer Poly cotton - Water and Rot proof
Color	Natural Color or can be customized as per the requirements
Weight	300 gsm approx. *Can be customized as per client requirement
PACKAGING	Each tent is packed in a canvas bag

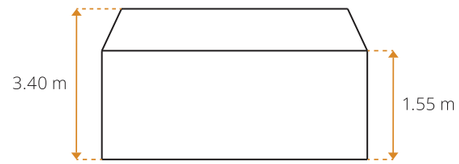

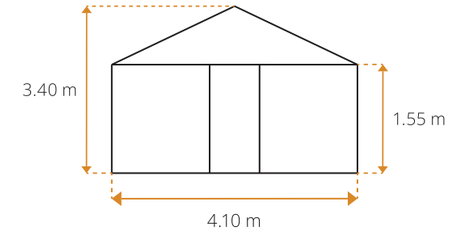



SUITABLE FOR A FAMILY OF 5-6

FEATURES

- Easy to assemble
- Requires only 4-5 people to setup

WATERPROOF ANTI-ROT UV PROTECTION

NATIONAL TENT HOUSE

SAHARA TENT




SAHARA TENT


Dimensions	Outer	Inner
Length	5.0 m	4.80 m
Width	3.50 m	3.30 m
Central Height	2.80 m	2.70 m
Wall Height	1.20 m	
Door (W x H)	1.50 x 1.80 m	
Window	6	

Poles and Accessories	
Standing + Side Poles	8
Ridge Pole	1
Door Pole	1
Pegs	10
Pins	12
Hammer	1

MATERIAL DETAILS

OUTER TENT	
Composition	Poly Cotton - Water, UV and Rot proof
Weight	Approx. 350 gsm
SIDEWALL	
Composition	Poly Cotton - Water, UV and Rot proof
Weight	Approx. 190 gsm
GROUND SHEET	Approx. 200 gsm Stitched with inner tent in Bath Tub Style
PACKAGING	One complete Tent packed in PE Bag

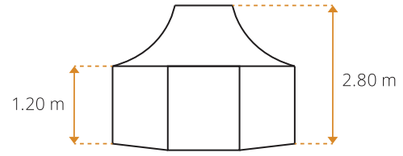



CONTAINER LOADABILITY
20FT: 200 Tents
40DC: 425 Tents

45 Kg	0.20m³	1.90 x 0.3 x 0.35 m
Tent Packed Weight (±5%)	Tent Packed Volume (±5%)	Packed Dimensions (±5%)

WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE

KUWAITI DELUXE TENT



KUWAITI DELUXE TENT


Dimensions	
Total Living Area	16 m²
Length	4.0 m
Width	4.0 m
Center Height	3.0 m
Wall Height	1.80 m
Windows	2 (0.6 X 0.4 m)
Doors (W x H)	2 (1.0 x 1.8 m)


Poles and Accessories:	
Ridge Pole	1
Side Poles	12
Pegs	12 made of Iron
Pins	12 made of Iron
Hammer	1 made of Iron


MATERIAL DETAILS

COMPOSITION Made from 3 layers of Poly-cotton
Layer 1: Approx 450 gsm - Natural colour - Water and Rot proof
Layer 2: Approx 150 gsm - Black Sheeting
Layer 3: Approx 150 gsm - Dyed/Printed Cotton Dusooti Cloth

PACKING Each tent is packed in canvas bag

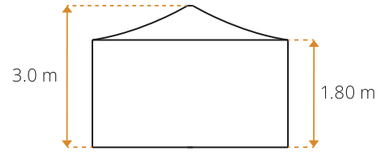

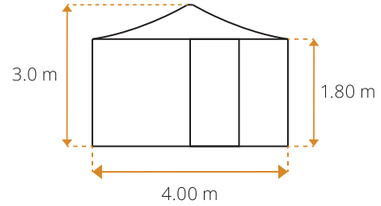



SUITABLE FOR A FAMILY OF 5-6

FEATURES

- Easy to setup
- Can be used for temporary shelter, schools, medical facility
- Cost affective
- Logo can be added as per clients need
- Outer Tent colour can be customized as per the clients need

WATERPROOF ANTI-ROT UV PROTECTION

NATIONAL TENT HOUSE

SINGLE POLE TENT




SINGLE POLE TENT


Dimensions	
Total Living Area	16 m²
Length	4.00 m
Width	4.00 m
Central Height	2.70 m
Side Wall Height	1.50 m
Door Height	1.80 m
Window	2 (0.6 x 0.4 m)


Poles and Accessories	
Central Poles	1
Side Poles	12
Pegs	12 made of Iron
Pins	12 made of Iron
Hammer	1 made of Iron

MATERIAL DETAILS

OUTER TENT	
Composition	Cotton canvas - Water and Rot proof
Weight	450 gsm approx.
Color	Natural color
INNER SIDE	
Composition	Cotton canvas - Water and Rot proof
Weight	120 gsm (±5%)
Cloth	Yellow Cotton Dusooti Cloth
PACKAGING	Each tent in a canvas bag

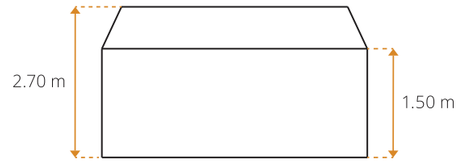

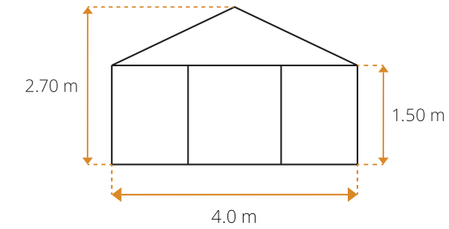



SUITABLE FOR A FAMILY OF 5-6

FEATURES

- Easy to assemble
- Requires only 3-4 people to setup

WATERPROOF ANTI-ROT UV PROTECTION

NATIONAL TENT HOUSE


HIGH PERFORMANCE TENT (UNICEF STANDARD)





HIGH PERFORMANCE TENT

UNICEF STANDARD | 24M² | ALSO AVAILABLE IN 48M² AND 72 M²

Dimensions	
Total Living Area	24 m^2
Length	6.0
Width	4.0
Center Height	3.00 m
Side Wall Height	2.05 m
Door Height	2.05 m
Window	2 (1.35 x 1.35 m)
Ventilation	6 (1.35 x 0.20 m)

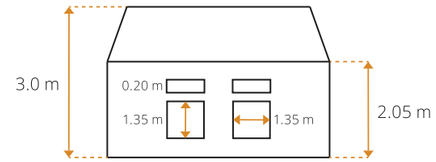

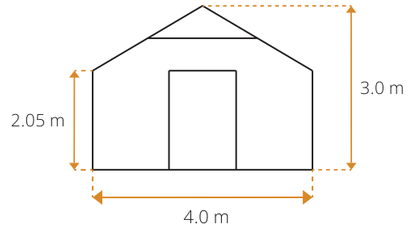



MATERIAL DETAILS - STANDARD LINER - FR

OUTER TENT & MUDFLAPS
Composition 250 g/m^2 (±10%) HDPE/LDPE laminated woven fabric, waterproof 5000 mm, UV resistant, fire retardant CPAI84-6 - Washable/disinfectable

GROUND SHEET
Composition 190 g/m^2 (±10%) HDPE/LDPE laminated woven fabric, waterproof 5000 mm, fire retardant CPAI 84-5, rot-proof and durable

SHADE NET
Composition 190 g/m^2 (±10%) HDPE knitted mesh, UV-resistant, rot-proof, fire retardant CPAI84-6. 6x guy rope PP 4.5 m/10 mm Ø with reflective stripes and 'glow-in-the-dark' PE tension

FRAME AND ACCESSORIES
Pipes Made of Aluminum
Connectors Made of Steel

ADDONS (Optional)
Solar Lighting Kit
Inner Liner
Winter Liner
Partitioning Kit

PACKING Each tent is packed in two wooden boxes strapped together

FEATURES

- Available in 3 different sizes- 24m², 48m² and 72m²
- Comfortable shelter for education, medical, storage, office use or accommodation
- Does not absorbs moisture below zero degree temperature and does not 'heat up' in direct sunlight
- Vertical walls increases use of inner space
- Cost efficient, lightweight and compact packing
- Rot and mildew proof, easy to clean and disinfect, resistant to commonly used disinfectants and detergents
- Advanced ventilation and large windows
- Has replaceable logo windows and cable connectors for power supply

CONTAINER LOADABILITY

Caged Packing
(3 Tents per Cage)
20FT: 36 Tents
40DC: 78 Tents
40FT HC: 78 Tents

5-YEARS SHELF LIFE
DRY, CLEAN & VENTILATED WAREHOUSE

268 Kg	1.18 m^3	2.22 x 7.0 x 4.0 m	2.20 x 6.5 x 2.5 m
Tent Packed Weight (±5%)	Tent Packed Volume (±5%)	Packed Dimensions Bag 1 (±5%)	Packed Dimensions Bag 2 (±5%)

Can stand the pressure of 120 Km/h wind

CPAI84 FIRE RETARDANT · WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE


MULTIPURPOSE TENT



MULTIPURPOSE TENT
MSF/ICRC/IFRC/IOM STANDARD

Dimensions	Outer	Inner
Length	7.5 m	7.10 m
Width	6.0 m	5.80 m
Ridge Height	3.0 m	2.80 m
Side Wall Height	2.10 m	1.95 m
Total Living Area	45 m²	
Total Doors	04	
Windows	04	

Ventilation: 3 high ventilation windows on each side, with sun-visors/shutters, grill, and mosquito netting. 1 high ventilation window on each gable with shutter, canopy/sun-visor, and mosquito netting

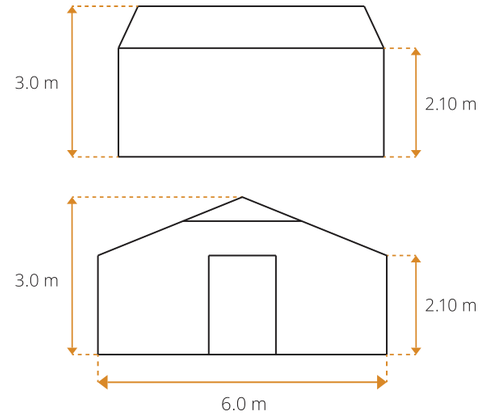

MATERIAL DETAILS

OUTER TENT	
Roof	440 gsm, Poly-Cotton blended fiber yarns - UV, Rot and Water Resistant
Sidewall	320 gsm, Poly-Cotton blended fiber yarns - UV, Rot and Water Resistant
INNER TENT	Approx. 120 gsm Poly-cotton - UV, Water and Rot proof
MUDFLAPS	540 gsm polyster with Polyster 1100 Dtex, PVC coating on both sides
FRAMES & ACCESSORIES	
Aluminum	Pipes (40 x 2 mm) with same steel connectors
Pegs	10 made of Steel
Pins	26 made of Steel
Hammer	1 made of Iron
ADDONS: (Optional)	Approx. 540 gsm Ground Sheets Approx. 140 gsm Shade Net - UV treated Approx. 300 gsm Partition walls Approx. 130 gsm Inner linear with sewed in bath tube type ground sheet is also available as an option
PACKING	Each tent is sandwich packed in 2 different PE bag bundles

FEATURES

- Available in 2 different sizes: 45m² and 33m²
- Ridge Frame Tent with sloped slides
- Can be used for schooling, office, clinic, healthcare and temporary shelter
- Can be joined for a longer structure

CONTAINER LOADABILITY

Non-Palletized
20FT: 36 tents
40DC: 72 tents
40FT HC: 72 tents
*Caged and Pallet packaging can be done as per client's request

5-YEARS SHELF LIFE
DRY, CLEAN & VENTILATED WAREHOUSE

200 Kg	0.70m³	0.21 x 0.95 x 0.35 m
Tent Packed Weight (±5%)	Tent Packed Volume (±5%)	Packed Dimensions (±5%)

*OPTIONAL

CPAI84 FIRE RETARDANT | WATERPROOF | ANTI-ROT | UV PROTECTION

NATIONAL TENT HOUSE

MULTIPURPOSE TENT - HEAVY DUTY




MULTIPURPOSE TENT - HEAVY DUTY

MSF/ICRC/IFRC/IOM STANDARD

Dimensions	Outer	Inner
Length	7.5 m	7.10 m
Width	6.0 m	5.80 m
Ridge Height	3.0 m	2.80 m
Side Wall Height	2.10 m	1.95 m
Total Living Area	45 m²	
Total Doors	4	
Windows	4	

Ventilation: 3 high ventilation windows on each side, with sun-visors/shutters, grill, and mosquito netting. 1 high ventilation window on each gable with shutter, canopy/sun-visor, and mosquito netting

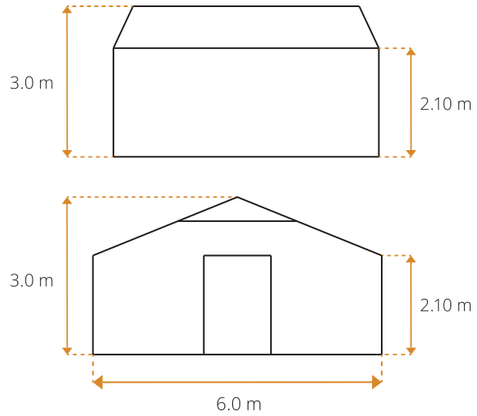

MATERIAL DETAILS

OUTER TENT	600 gsm (±10%) Polyster with PVC coating on both sides
INNER TENT	Approx 120 gsm Poly-cotton - UV, Rot and Water Resistant
FRAMES & ACCESSORIES	
Aluminium	Pipes (40 x 2 mm) with same Steel connectors
Pegs	10 made of Steel
Pins	26 made of Steel
Hammer	1 made of Iron
ADDONS	Approx. 540 gsm Groundsheet Approx. 140 gsm Shade net - UV treated Approx. 300 gsm Partition walls Approx. 130 gsm Inner linear with sewed in bath tube type Groundsheet is also available as an option
PACKING	Packed in 2 PVC bundle joined together (Sandwich Packed)

FEATURES

- MSF/ICRC/IFCR/IOM Standard
- Available in 2 different sizes- 33m², 45m²
- Ridge frame tent with sloped sides
- Can be used for Schooling, Office, Clinic, Healthcare and Temporary Shelter
- Multiple options available for inner tent, shade net, partition sets and Groundsheet which can be customized as per the use of tents and climate needs
- Can be joined together for a longer structure

CONTAINER LOADABILITY

20FT: 36 Tents
40DC: 72 Tents
40FT HC: 72 Tents
*Caged and Pallet packing can be done as per client's request

5-YEARS SHELF LIFE
DRY, CLEAN & VENTILATED WAREHOUSE

0.70m³ — Tent Packed Volume (±5%)

0.21 x 0.95 x 0.35 m — Packed Dimensions (±5%)

*OPTIONAL

CPAI84 FIRE RETARDANT | WATERPROOF | ANTI-ROT | UV PROTECTION

NATIONAL TENT HOUSE


DISPENSARY TENT





DISPENSARY TENT

ICRC STANDARD (27.5M²)

Dimensions	
Total Living Area	27.5 m^2
Length	5.5 m
Width	5.0 m
Ridge Height	2.5 m
Wall Height	1.8 m
Total Doors	2
Triangular Windows	4 (0.4 x 0.4 m)







SUITABLE FOR 8-20 PEOPLE

MATERIAL DETAILS

OUTER TENT Roof, Wall, Door	440 gsm single layer Polycotton- Water, Rot and UV resistant
WINDOW	4 triangular windows with mosquito nets
FRAME AND ACCESSORIES	
Frame	Aluminium Frame with 40 mm Diameter and 2 mm Thickness
Standing Poles	8, 175 cm with base plate
Ridge Beam Poles	8, 145 cm
Ridge Poles	9, 171 cm
Connectors	12
Pegs	10
Pins	20
Hammer	1
ADDONS (Optional)	Fire Retardancy Bath tube style ground sheet Shade Net
PACKING	Tent and pipe set are packed in a single bag while socket packed in wooden box

FEATURES

- Can be used for Schooling, Office, Clinic, Healthcare and Temporary Shelter
- Requires 4 persons to setup and can easily setup in 30 minutes
- Designed to tolerate high wind pressure, heavy rainfall and provide protection against micro-organisms

CONTAINER LOADABILITY

Non-Palletized
20FT: 35 Tents
40DC: 70 Tents
40FT HC: 90 Tents

105 Kg	0.384 m^3	1.90 x 4.5 x 4.5 m
Tent Packed Weight (±5%)	Tent Packed Volume (±5%)	Packed Dimensions (±5%)

***OPTIONAL**

CPAI84 FIRE RETARDANT | WATERPROOF | ANTI-ROT | UV PROTECTION

NATIONAL TENT HOUSE


EDUCARE TENT



EDUCARE TENT

24M² | ALSO AVAILABLE IN 42M² AND 72 M²

Dimensions	Outer	Inner
Length	6.0	6.0 m
Width	4.0	4.0 m
Center Height	2.80 m	2.30 m
Side Wall Height	1.95 m	1.80 m
Total Living Area	24 m²	
Total Doors	2 (1.00 x 1.80 m)	
Windows	6 windows on long sidewall (0.85m x 0.85m) 4 windows on short side wall (0.70 x 0.85)	

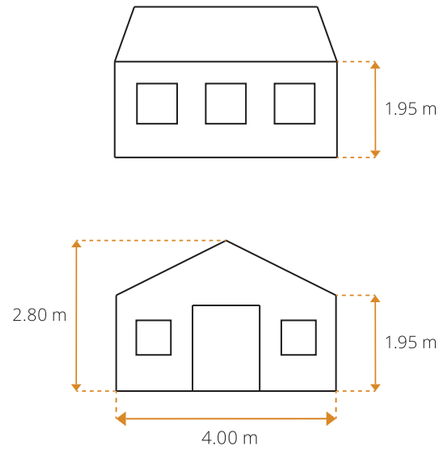

MATERIAL DETAILS - FR

OUTER TENT	450 - 455 gsm Fire retardant PVC coated fabric 5000 mm, natural white
INNER TENT	120 gsm Polycotton, natural white - Fire, Water, Rot and UV resistant
GROUND SHEET	180 gsm Polyethylene (HDPE), PVC fabric, sewn in bathtub, light grey/natural white
WINDOWS	All windows comes with PE stripes reinforcement
FRAME	35 Aluminum pipes, 37 mm diameter, 2 mm thick, silver 10 Steel connectors, silver 12 Steel connectors with base plates, silver 4 Hanging steel connectors
PACKING	Each tent is packed in two separate PE Bags or wooden boxes

FEATURES

- Available in 3 different sizes- 24m², 42m² and 72m²
- Outer tent and mudflap are made from PVC coated fabric
- Comfortable shelter for education, medical, storage, office use or accommodation

CONTAINER LOADABILITY

Pallet-Packing
20FT: 24 Tents
40DC: 50 Tents
40FT HC: 60 Tents

5-YEARS SHELF LIFE
DRY, CLEAN & VENTILATED WAREHOUSE

195 Kg	0.962 m³	1.10 x 9.4 x 5.2 m	1.92 x 4.6 x 4.8 m
Tent Packed Weight (±5%)	Tent Packed Volume (±5%)	Packed Dimensions PVC Bag (±5%)	Packed Dimensions Wooden box (±5%)

CPAI84 FIRE RETARDANT · WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE

SCHOOL TENT (UNHCR STANDARD)





SCHOOL TENT


UNHCR STANDARD | 72M² | ALSO AVAILABLE IN 84M²

Dimensions	
Total Living Area	72 m^2
Length	12.0 m
Width	6.0 m
Center Height	3.60 m
Wall Height	2.00 m
Door	2 (2.0 x 2.0 m)
Window	12 (0.6 x 0.4 m)
Ventilation	6

Poles and Accessories	
Standing Poles	14
Door Poles	4
Pegs	18
Pins	18
Hammer	1

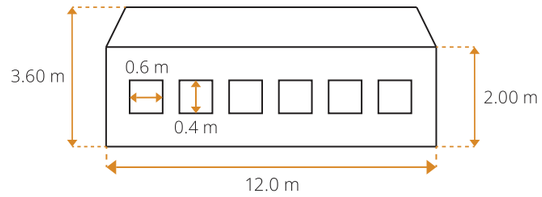

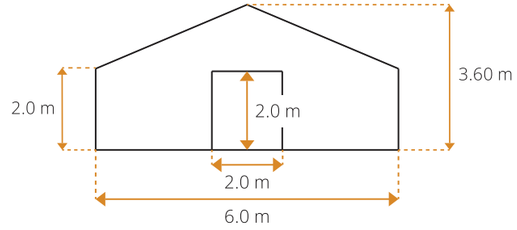

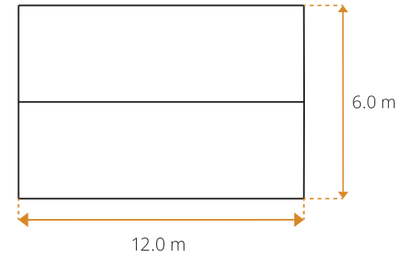

MATERIAL DETAILS - STANDARD LINER

OUTER TENT	
Composition	Made of single layer of natural colour water and rot proof canvas
Weight	Approx. 450 gsm
TENT	
Composition	Made of two layers of cloth
Layer1	Natural color-water UV and rot-proof canvas
Weight	Approx. 450 gsm
Layer 2	Dyed cotton sheeting
Weight	Approx. 160 gsm
ADDONS (OPTIONAL)	Fly sheet
PACKING	Each tent packed in 5 heavy duty canvas bags or Wooden Boxes

FEATURES

- Comfortable shelter for education, medical, storage, office use or accommodation
- Can accommodate 50-70 people
- Easy to setup
- Tent Size can be customized to 84m^2 as well

WATERPROOF ANTI-ROT UV PROTECTION

NATIONAL TENT HOUSE


MARQUEE TENT





MARQUEE TENT

Dimensions	
Total Living Area	50 m²
Length	5 m
Width	10 m
Central Height	3.3 m
Sidewall Height	2 m
Window	3
Ventilation	4
Frame	Electroplated steel poles

Poles and Accessories:	
Standing Pole	3
Ridge Pole	2
Side Poles	26
Pins	26
Pegs	26
Hammer	2



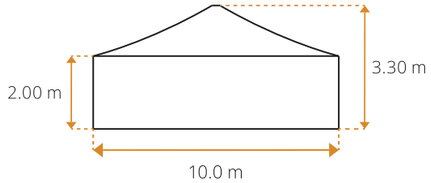

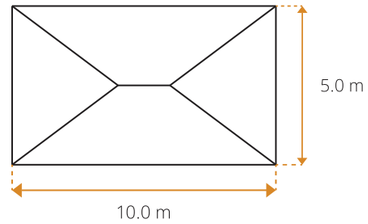

MATERIAL DETAILS

OUTER TENT	
Composition	Poly-cotton - Weatherproof UV, Rot and Mildew Resistant
Weight	350, 400 or 450 gsm *Can be customized as per client requirement
SIDEWALL	
Composition	Poly-cotton - Weatherproof UV, Rot and Mildew Resistant
Weight	350, 400 or 450 gsm *Can be customized as per client requirement
GROUND SHEET	190 g/m² (±10%) HDPE/LDPE laminated woven fabric, waterproof (Optional) rot proof and UV resistant

FEATURES

- Dimensions and material quality can be customized as per the client needs
- Customizable logo can be printed
- Easy to setup
- Can be used for multipurpose: Schooling, Medical Facility, Storage, Temporary shelter

CONTAINER LOADABILITY

20FT: 40 Tents
40DC: 100 Tents
40FT HC: 100 Tents

170 KG
Tent Packed Weight (±5%)


0.512 m³
Tent Packed Volume (±5%)

BAG1: 2.20 x 0.42 x 0.30 m (Roof, Center Poles, 1 Ridge Pole)
BAG2: 2.04 x 0.42 x 0.25 m (Side walls, Side poles, Repairing Kit)
BAG3: 0.38 x 0.31 x 0.17 m (Pegs, pins, hammer)

WATERPROOF
ANTI-ROT
UV PROTECTION

NATIONAL TENT HOUSE

WINTERIZATION KIT

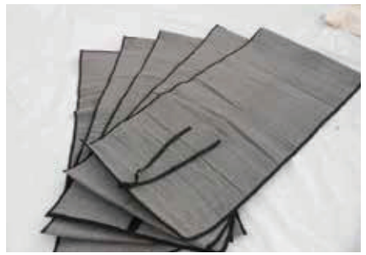

1) INSULATING FLOOR MATS



2) HEAT RESISTANT FLOOR PROTECTION SHEET



3) INNER LINING



4) HEATER FLUE PIPE SLEEVE



5) PARTITION WALL



6) WINTERIZATION BUNDLE

PACKAGING

Non-Palletized

30 KG	0.17 m³	0.93 x 0.45 x 0.40 m
Weight (±10%)	Volume (±5%)	Dimensions (±5%)

CRI Pallets

153 kg	1.01 m³	1.12 x 0.80 x 1.15 m
Weight (±10%)	Volume (±5%)	Dimensions (±5%)

Caged Packing

478 kg	2.76 m³	2.0 x 1.12 x 1.15 m
Weight (±10%)	Volume (±5%)	Dimensions (±5%)

CONTAINER LOADABILITY

Non-Palletized

20FT: 180 Kits
40FT: 360 Kits
40HC: 450 Kits

CRI Pallet
(4 Kits per pallet)
20FT: 28 Pallets (112 Kits)
40FT: 60 Pallets (240 Kits)
40HC: 60 Pallets (240 Kits)

Caged Packing
(15 Kits per Cage)
20FT: 10 Cages (150 Kits)
40FT: 20 Cages (300 Kits)
40HC: 20 Cages (300 Kits)

WINTERIZATION KIT

UNHCR/IFRC/ICRC STANDARD

FEATURES

• Specially designed for UNHCR Standard/ICRC Standard Family Tent to improve insulation against cold weather and protect the families from cold weather
• All components are fire retardant to the level of CPAI84 regulation
• All materials and additives are non-toxic, free from asbestos and other toxic products according to the EC regulations

KIT CONTENT

The kit Includes following items:
• 5 insulated sleeping mats
• 1 innear lining
• 1 Partition wall
• 1 heat resistant floor protection sheet
• 1 heat resistance, heater flue pipe sleeve

1) INSULATING FLOOR MATS

Dimensions	
Length	1.80 m
Width	0.90 m

MATERIAL COMPOSITION:

1ST LAYER - PLASTIC MAT	500 gsm virgin poly-propylene (PP) multifilament, 500 denier in warp PP, hollow tube in weft. Made in tightly woven twill structure, with minimum 1,000 tubes/meter length. With heavy-duty ribbon, strongly stitched around the entire perimeter
2ND LAYER - ALUMINIZED CANVAS	Aluminized Canvas: Strong synthetic canvas with durable aluminum coating, soft and noiseless
3RD LAYER - FLEECE BLANKET	Fleece Blanket: Medium thermal blanket. ISO 12952 -: Resistance to cigarette. No ignition ISO 12952 -: Resistance to flame. No ignition

2) HEAT RESISTANT FLOOR PROTECTION SHEET

• Can be used in any tent to protect the groundsheet when using a stove or heater
• Fibrocement plates, 100% Fire proof and rigid material

Dimensions	
Size	0.5 x 1.0 m
Thickness	0.40 m
Quantity	4-6 Plates

3) INNER LINING AND PARTITION

Dimensions	
Length	3.80 m
Width	3.80 m
Centre Height	2.30 m
Wall Height	1.35 m

MATERIAL COMPOSITION:

COMPOSITION	Made of breathable, Water, Rot proof, UV and Fire Retardant Canvas
TENSILE STRENGTH	ISO13934-1, warp and weft 300N minimum
TEAR STRENGTH	ISO9073-4, warp and weft 20N minimum
WEIGHT	130 Gsm (±10%), Weight will increase in case of FR treatment

4) HEATER FLUE PIPE SLEEVE

Can be used only with tents originally equipped with standard chimney patch and flap

Dimensions	
Base Size	0.35 x 0.70 m
Height	0.40 m
Hole Diameter	0.15 m

MATERIAL COMPOSITION:

DESIGN	Pyramid base has Velcro grip to the Velcro of the tent chimney outer flap • 100% Fireproof, Tear-proof, Waterproof Soft canvas • Tear resistance under ISO9073-4: minimum 40N • Waterproof under ISO811: minimum 20HPA (20cm)

NATIONAL TENT HOUSE

STOVE







Non-Palletized

35 KG	0.1056 m³	0.88 x 0.3 x 0.4 m
Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

Palletized

154 kg	0.82 m³	1.12 x 0.78 x 0.94 m
Pallet Weight (±5%)	Volume (±5%)	CRI Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY

Non-Palletized

20FT: 210 Pcs
40DC: 455 Pcs
40FT HC: 540 Pcs

Palletized
(4 Cartons per Pallet)
20FT: 28 Pallets (112 Pcs)
40DC: 60 Pallets (240 Pcs)
40FT HC: 60 Pallets (240 Pcs)

STOVE

UNHCR/ICRC/IFRC STANDARD

FEATURES

- Efficient wood-burning stove for standard tents and shelters with chimney openings
- Maximized effectiveness when used with UNHCR/ICRC Standard Winterization Kit
- Has a loading door & can control air intake.

Dimensions

Chimney Pipe	50 cm long
Chimney Outlet	90 mm

MATERIAL

STOVE	2 mm thick, made of Steel
CHIMNEY OUTLET	90 mm thick, made of Steel
CHIMNEY PIPES	6 pipes made of Galvanized Steel, Rust Proof
CHIMNEY ELBOWS	2 Elbows, made of Steel, Rust Proof
CHIMNEY HOOD	1, made of Steel, Rust Proof
DISC	1 Anti-Sparc disc, made of Steel
BRACKETS	2 Brackets for holding pipes and to support. Made of Steel, Rust Proof
TRIPOD SUPPORT	Made of Square Steeltube, minimum 25 x 1 mm thick, Anti-Rust paint

CONTENTS

- Outlet to fit 100 mm Pipes
- 6 Chimney Pipes made of Galvanized Steel & Anti-Rust
- 2 Bend Connectors made of Steel
- 1 Outlet cover pointed cap shape
- 1 Spark Stopper dimensions: Height 180 mm, Outer diameter 300 mm and Inner plate 180 mm
- 1 Ash removing bar
- 1 Tripod Pipe stand to keep the smoke pipe standing up outside the tent, supported with 3 x 6 mm guy ropes. Supplied with 2 clamps, 3 ground pins for stand support and 3 pegs for guy ropes
- 1 Spanner
- 1 Assembly Instruction Sheet

NATIONAL TENT HOUSE

Global Recycled Standard


BLANKET HIGH THERMAL (UNHCR/UNICEF)



BLANKET HIGH THERMAL
UNHCR/UNICEF STANDARD

FEATURES

- Knitted blanket dry raised on both sides
- Resistant to fire, thermal and airflow
- Comfortable and lightweight
- Customizable logo can be pasted as per the requirements
- Recyclable yarn can also be used as per the client requirements

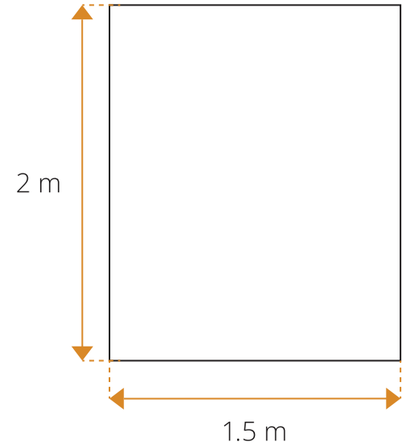

Dimensions

Length	2.0 m (Tolerance - 1-3%)
Width	1.50 m (Tolerance - 1-3%)
Weight	500 - 600 gsm
Edges	Whipped seam at 10 mm from the edge with 10 - 13 stitches/10 cm on 4 sides
Thickness:	ISO 5084, 5 mm minimum (1KPa on 2000 mm^2)
Tog	ISO 5085-1: TOG 4 (or 0.40m^2 K/W) minimum
Shrinkage	ISO 6330: Max 5% warp and weft

MATERIAL

COMPOSITION	100% virgin fibers from polyester, knitted and dry raised on both sides, ISO C1833 on dry weight. – **Recyclable polyester can also be used as per client's request**
COLOR	Grey
TENSILE STRENGTH	ISO 13934-1: 250N warp and weft minimum
WEIGHT LOSS AFTER WASHING	Max 5% after 3 consecutive machine washes at 30°C and one flat drying
AIRFLOW RESISTANCE	ISO 9237 under 100Pa pressure drop: Max 1000L/m^2/s
FIRE RESISTANCE	ISO 12952: Resistance to cigarette. No ignition ISO 12952: Resistance to flame. No ignition Specification under normal textile test conditioning ISO 139, 65% moisture, 20°C for 24 hours
ORGANOLEPTIC TEST	No bad smell, no skin irritation, no dust. 4<pH<9. Free from harmful VOC. Fit for human use
FINISH	Whipped seam at 10 mm from the edge with 10 - 13 stitches/10 cm on 4 sides

Bale Packing

27 Kg	0.21 m^3	0.8 x 0.5 x 0.5 m
Bale Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

CRI Pallet

119.50 Kg	1.03 m^3	1.15 x 0.78 x 1.15 m
Pallet Weight (±5%)	Volume (±5%)	Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY

Bale Packing
(15 Pcs per Bale)
20FT: 140 Bales (2100 Pcs)
40DC: 300 Bales (4500 Pcs)
40FT HC: 336 Bales (5040 Pcs)

CRI Pallet
(4 Bales/60 Pcs per Pallet)
20FT: 28 Pallets (1680 Pcs)
40DC: 60 Pallets (3600 Pcs)
40FT HC: 60 Pallets (3600 Pcs)

Global Recycled Standard

FIRE RETARDANT

NATIONAL TENT HOUSE

Global Recycled Standard


BLANKET HIGH THERMAL (ICRC/IOM)



BLANKET HIGH THERMAL
ICRC/IOM STANDARD

FEATURES

- Knitted blanket dry raised on both sides
- Resistant to fire, thermal and airflow
- Comfortable and lightweight
- Customizable logo can be pasted as per the requirements
- Recyclable yarn can also be used as per the client requirements

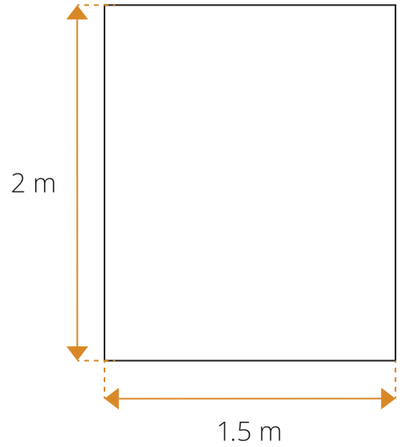

Dimensions

Length	2.0 m (Tolerance - 1-3%)
Width	1.50 m (Tolerance - 1-3%)
Weight	500 - 1000 gsm
Edges	Whipped seam at 10 mm from the edge with 10 - 13 stitches/10 cm on 4 sides
Thickness:	ISO 5084, 9.5 mm minimum (1KPa on 2000 mm^2)
Tog	ISO 5085-1: TOG 4 (or 0.40m^2 K/W) minimum
Shrinkage	ISO 6330: Max 5% warp and weft

MATERIAL

COMPOSITION	100% virgin fibers from polyester, knitted and dry raised on both sides, ISO C1833 on dry weight. – **Recyclable polyester can also be used as per client's request**
COLOR	Grey
TENSILE STRENGTH	ISO 13934-1: 250N warp and weft minimum
WEIGHT LOSS AFTER WASHING	Max 5% after 3 consecutive machine washes at 30°C and one flat drying
AIRFLOW RESISTANCE	ISO 9237 under 100Pa pressure drop: Max 1000L/m^2/s
FIRE RESISTANCE	ISO 12952: Resistance to cigarette. No ignition ISO 12952: Resistance to flame. No ignition Specification under normal textile test conditioning ISO 139, 65% moisture, 20°C for 24 hours
ORGANOLEPTIC TEST	No bad smell, no skin irritation, no dust. 4<pH<9. Free from harmful VOC. Fit for human use
FINISH	Whipped seam at 4-7 mm from the edge with 20-35 stitches/10 cm on 4 sides

Bale Packing

27 Kg	0.286 m^3	0.8 x 0.55 x 0.70 m
Bale Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

CRI Pallet

70 Kg	0.681 m^3	1.12 x 0.78 x 0.78 m
Pallet Weight (±5%)	Volume (±5%)	Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY

Bale Packing
(15 Pcs per Bale)
20FT: 96 Bales (1440 Pcs)
40DC: 204 Bales (3060 Pcs)
40FT HC: 255 Bales (3825 Pcs)

CRI Pallet
(2 Bales/30 Pcs per Pallet)
20FT: 42 Pallets (1260 Pcs)
40DC: 90 Pallets (2700 Pcs)
40FT HC: 90 Pallets (2700 Pcs)

Global Recycled Standard

FIRE RETARDANT

NATIONAL TENT HOUSE

Global Recycled Standard

BLANKET MEDIUM THERMAL (UNHCR/UNICEF)



Bale Packing

29.5 Kg	0.21 m³	0.8 x 0.5 x 0.5 m
Bale Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

CRI Pallet

129.5 Kg	1.03 m³	1.15 x 0.78 x 1.15 m
Pallet Weight (±5%)	Volume (±5%)	Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY

Bale Packing
(20 Pcs per Bale)
20FT: 140 Bales (2900 Pcs)
40FT : 300 Bales (6000 Pcs)
40FT HC: 336 Bales (6720 Pcs)


CRI Pallet
(4 Bales/80 Pcs per Pallet)
20FT: 28 Pallets (2240 Pcs)
40DC: 60 Pallets (4800 Pcs)
40FT HC: 60 Pallets (4800 Pcs)

BLANKET MEDIUM THERMAL

UNHCR/UNICEF STANDARD

FEATURES

- Knitted blanket dry raised on both sides
- Resistant to fire, thermal and airflow
- Comfortable and lightweight
- Customizable logo can be pasted as per the requirements
- Recyclable yarn can also be used as per the client requirements

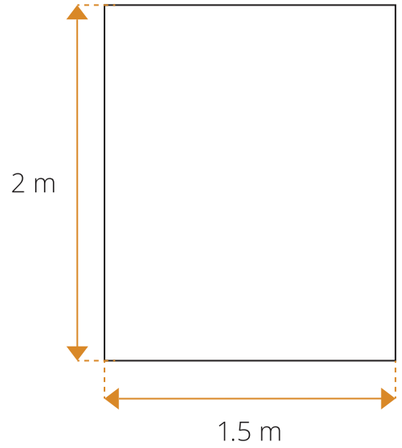

Dimensions

Length	2.0 m (Tolerance - 1-3%)
Width	1.50 m (Tolerance - 1-3%)
Weight	350 - 450 gsm
Edges	Whipped seam at 10 mm from the edge with 10 - 13 stitches/10 cm on 4 sides
Thickness	ISO 5084, 3 mm minimum (1KPa on 2000 mm^2)
Tog	ISO 5085-1: TOG 2.5 (or 0.25m^2 K/W) minimum
Shrinkage	ISO 6330: Max 5% warp and weft

MATERIAL

COMPOSITION	100% virgin fibers from polyester, knitted and dry raised on both sides, ISO C1833 on dry weight. – **Recyclable polyester can also be used as per client's request**
COLOR	Grey
TENSILE STRENGTH	ISO 13934-1: 250N warp and weft minimum
WEIGHT LOSS AFTER WASHING	Max 5% after 3 consecutive machine washes at 30°C and one flat drying
AIRFLOW RESISTANCE	ISO 9237 under 100Pa pressure drop: Max 1000L/m^2/s
FIRE RESISTANCE	ISO 12952: Resistance to cigarette. No ignition ISO 12952: Resistance to flame. No ignition Specification under normal textile test conditioning ISO 139, 65% moisture, 20°C for 24 hours
ORGANOLEPTIC TEST	No bad smell, no skin irritation, no dust. 4<pH<9. Free from harmful VOC. Fit for human use
FINISH	Whipped seam at 10 mm from the edge with 10-13 stitches/10 cm on 4 sides

Global Recycled Standard

FIRE RETARDANT

NATIONAL TENT HOUSE

Global Recycled Standard

BLANKET MEDIUM THERMAL (ICRC/IOM)



Bale Packing

24 Kg	0.21 m³	0.8 x 0.5 x 0.65 m
Bale Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

CRI Pallet

104 Kg	1.03 m³	1.15 x 0.78 x 1.15 m
Pallet Weight (±5%)	Volume (±5%)	Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY


Bale Packing
(20 Pcs per Bale)
20FT: 96 Bales (1920 Pcs)
40DC: 204 Bales (4080 Pcs)
40FT HC: 255 Bales (5100 Pcs)

CRI Pallet
(2 Bales/40 Pcs per Pallet)
20FT: 42 Pallets (1680 Pcs)
40DC: 90 Pallets (3600 Pcs)
40FT HC: 90 Pallets (3600 Pcs)

BLANKET MEDIUM THERMAL
ICRC/IOM STANDARD

FEATURES

- Knitted blanket dry raised on both sides
- Resistant to fire, thermal and airflow
- Comfortable and lightweight
- Customizable logo can be pasted as per the requirements
- Recyclable yarn can also be used as per the client requirements

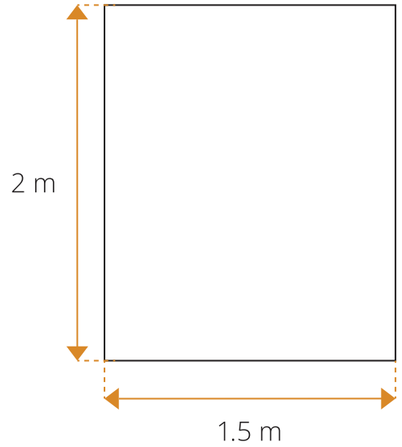

Dimensions

Length	2.0 m (Tolerance - 1-3%)
Width	1.50 m (Tolerance - 1-3%)
Weight	400 - 700 gsm
Edges	Whipped seam at 10 mm from the edge with 10 - 13 stitches/10 cm on 4 sides
Thickness	ISO 5084, 6.5 mm minimum (1KPa on 2000 mm^2)
Tog	ISO 5085-1: TOG 2.5 (or 0.25m^2 K/W) minimum
Shrinkage	ISO 6330: Max 5% warp and weft

MATERIAL

COMPOSITION	100% virgin fibers from polyester, knitted and dry raised on both sides, ISO C1833 on dry weight. – **Recyclable polyester can also be used as per client's request.**
COLOR	Grey
TENSILE STRENGTH	ISO 13934-1: 250N warp and weft minimum
WEIGHT LOSS AFTER WASHING	Max 5% after 3 consecutive machine washes at 30°C and one flat drying
AIRFLOW RESISTANCE	ISO 9237 under 100Pa pressure drop: Max 1000L/m^2/s
FIRE RESISTANCE	ISO 12952: Resistance to cigarette. No ignition ISO 12952: Resistance to flame. No ignition Specification under normal textile test conditioning ISO 139, 65% moisture, 20°C for 24 hours
ORGANOLEPTIC TEST	No bad smell, no skin irritation, no dust. 4<pH<9. Free from harmful VOC. Fit for human use
FINISH	Whipped seam at 10 mm from the edge with 10-13 stitches/10 cm on 4 sides

Global Recycled Standard

FIRE RETARDANT

NATIONAL TENT HOUSE

JERRY CAN 10 L (UNHCR)



JERRY CAN 10 L
UNHCR/UNICEF STANDARD

FEATURES

- 10 L container with handle for carrying
- Light weight collapsible container
- Useful for water storage
- Portable
- Reusable
- Impact resistant



Dimensions

Capacity	10L
Weight	190 - 230 g
Inlet Diameter	30 mm or 50 mm
Handle Length	90 mm
Handle Width	30 mm
String	1mm Diameter and 120 mm long

MATERIAL

CONTAINER COMPOSITION	Virgin or **recycled** food grade LDPE without toxic elements according to EN-1186-3-9 standard
COLOR	Translucent
TEMPERATURE	Can resist temperatures between -20° to 50° Celsius
IMPACT RESISTANCE	Impact resistant on hard surface when filled with maximum volume of 10L water. Complete drop test consists of 3 consecutive drops from a 2.0 m height.
LOGO	Can be embossed as per client's requirements

Cartons Packing

12 KG	0.071 m³	0.54 x 0.33 x 0.42 m
Carton Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

CRI Pallet

107.5 Kg	1.01 m³	1.15 x 0.77 x 1.10 m
Pallet Weight (±5%)	Volume (±5%)	CRI Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY

Cartons Packing
(50 Pcs per Carton)
20FT: 370 Cartons (18,500 Pcs)
40DC: 770 Cartons (38,500 Pcs)
40FT HC: 924 Cartons (46,200 Pcs)

CRI Pallet
(8 Cartons/400 Pcs per Pallet)
20FT: 28 Pallets (11,200 Pcs)
40DC: 60 Pallets (24,000 Pcs)
40FT HC: 60 Pallets (24,000 Pcs)

NATIONAL TENT HOUSE

JERRY CAN 10 L (ICRC)



JERRY CAN 10 L

ICRC/IFRC STANDARD (20L ALSO AVAILABLE)



FEATURES

- 10 L container with handle for carrying
- Light weight collapsible container
- Useful for water storage
- With Spigot
- Portable
- Reusable
- Impact resistant

Dimensions

Capacity	10L
Weight	180 - 230 g
Inlet Diameter	30 or 50 mm
Handle Length	90 mm
Handle Width	30 mm
String	1mm Diameter and 120 mm long

MATERIAL

CONTAINER COMPOSITION	Virgin or **recycled** food grade LDPE without toxic elements according to EN-1186-3-9
COLOR	Translucent
LOGO & PRINTING	Upon Customer request
TEMPERATURE CONTROL	Can resist temperatures between -20° to 50° Celsius
IMPACT RESISTANCE	Impact resistant on hard surface when filled with maximum volume of 10L water. Complete drop test consists of 10 consecutive drops from a 2.0 m height. To be accepted, the water container must resist to a minimum of 3 drops

Cartons Packing

12.5 KG	0.086 m³	0.62 x 0.33 x 0.42 m
Carton Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

CRI Pallet

165 Kg	1.330 m³	1.28 x 1.06 x 0.98 m
Pallet Weight (±5%)	Volume (±5%)	CRI Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY

Cartons Packing
(50 Pcs per carton)
20FT: 333 Cartons (16,650 Pcs)
40DC: 700 Cartons (35,000 Pcs)
40FT HC: 779 Cartons (38,950 Pcs)

CRI Pallet
(12 Cartons/600 Pcs per pallet)
20FT: 16 Pallets (9600 Pcs)
40DC: 36 Pallets (21,600 Pcs)
40FT HC: 36 Pallets (21,600 Pcs)

NATIONAL TENT HOUSE

KITCHEN SET



KITCHEN SET

UNHCR STANDARD - TYPE B

FEATURES

- Made of stainless steel as per ISO 1.4016 Standard
- Suitable for a family for 5 people
- Customization can be done as per client's request

1 Cooking Pot

Capacity	7L min
Diameter	25 - 28 cm

1 Frying Pan

Capacity	2.5 L min
Diameter	Adapted to 7 L Pot
Thickness	0.8 mm

1 Cooking Pot

Capacity	5 L min
Diameter	22 - 24 cm

5 Bowl

Capacity	1 L min
Height	5-7 cm
Thickness	0.5 mm

5 Plates

Capacity	0.75 min
Diameter	24-25 cm
Thickness	0.5 mm

5 Cups

Capacity	0.3L min
Handle	Must resist 1kg pulling

5 Table Forks

Length	17cm min
Resistance	Must resist 4 kg min
Thickness	1.5 mm at the back of the lines

5 Table Knives

Length	17 cm min
Resistance	Must resist 4 kg mi
Thickness	1 mm from the back blade

1 Kitchen Knife

Length	15 cm min
Resistance	Must resist 4 kg min
Thickness	1.5 mm blade from the centre

1 Wooden serving Spoon

Material	Hard wood
Length	30 cm
Thickness	10 mm blade from the handle

2 Serving Spoons

Capacity	35 ml min
Length	30 cm min
Thickness	1 mm in the centre of the scoop

1 Ladle

Capacity	100 ml min
Length	30 cm min
Thickness	1 mm in the centre of the scoop

5 Table Spoons

Capacity	10 ml min
Length	17 cm min
Thickness	1 mm in the centre of the scoop

1 Scouring Pad

Weight	20 g min

Carton Packing

6.8 KG	0.017 m³	0.30 x 0.30 x 0.19 m
Individual Kit Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

CRI Pallet

380 kg	1.104 m³	1.20 x 0.80 x 1.15 m
CRI Pallet Weight (±5%)	Volume (±5%)	CRI Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY

Carton Packing

20FT: 1638 Kitchen Sets
40DC: 3400 Kitchen Sets
40FT HC: 3696 Kitchen Sets

CRI Pallet

(52 Pcs per Pallet)
20FT: 1144 Kitchen Sets
40DC: 2496 Kitchen Sets
40FT HC: 2496 Kitchen Sets

NATIONAL TENT HOUSE

BLUE BUCKET UNHCR STANDARD





OPTIONAL

Carton Packing

18.5 KG	0.113 m³	1.10 x 0.31 x 0.33 m
Carton Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

CRI Pallet

125 Kg	0.960 m³	1.15 x 0.77 x 1.10 m
Pallet Weight (±5%)	Volume (±5%)	CRI Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY


Carton Packing
(20 Pcs per Carton)
20FT: 245 Cartons (4900 Pcs)
40DC: 504 Cartons (10,080 Pcs)
40FT HC: 576 Cartons (11,520 Pcs)

CRI Pallet
(6 Cartons/120 Pcs per Pallet)
20FT: 28 Pallets (3,360 Pcs)
40DC: 60 Pallets (7200 Pcs)
40FT HC: 60 Pallets (7200 Pcs)

BLUE BUCKET
UNHCR/UNICEF STANDARD

FEATURES

- Stackable and easy to carry
- Safe for transport and storage of drinking water
- The walls meet the bottom of the bucket with a curved inside surface to prevent dirt accumulation and facilitate cleaning
- Impact resistant on hard surface floor. The bucket resists at least to two (02) consecutive drops from 2 m high from the bucket's bottom, containing maximum volume of water (14 liters) at 20° C, without any damages
- The bucket gets back to its original shape (±10% to its original diameter after one hour) without damage after applying a pressure on the two sides of the top rim to make them touch one another in the middle
- The handle of the bucket also resists approx. 28kg traction in normal usage position

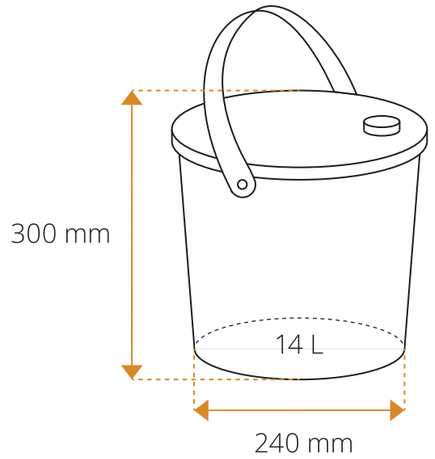

Dimensions

Capacity	14 L
Height	300 mm (±5%)
Top Diameter	300 mm (±5%)
Bottom Diameter	240 mm (±5%)
Cover	Outlet of 50mm (±10%) & screw cap or clip on cap

Weight

Bucket	600 g minimum
Cover	150 g minimum
Handle	30 g minimum

MATERIAL


CONTAINER COMPOSITION	Made of virgin or **recycled** HDPE high density polyethylene and virgin recycled LDPE low density polyethylene
COLOR	White Bucket
COVER & HANDLE	Blue Other colours can be requested
TAP (OPTIONAL)	Durable plastic (HDPE) tap with turn knob, fixed to bucket through hole with locking nut
LOGO	Can be embossed as per client's requirements

NATIONAL TENT HOUSE

GREEN BUCKET OXFAM STANDARD



GREEN BUCKET
OXFAM STANDARD

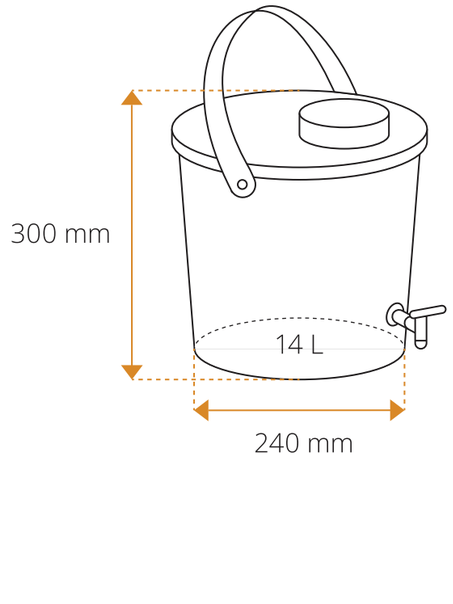

FEATURES

- Stackable and easy to carry
- Safe for transport and storage of drinking water
- An HDPE lid is tightly fitted to the body of the bucket through an improved rim lock design
- Larger lid opening (100mm) with a clip on cap
- The walls meet the bottom of the bucket with a curved inside surface to prevent dirt accumulation and facilitate cleaning
- Impact resistant on hard surface floor. The bucket resists at least to two (02) consecutive drops from 2 m high from the bucket's bottom, containing maximum volume of water (14 liters) at 20°C, without any damages.
- The bucket gets back to its original shape (±10% to its original diameter after one hour) without damage after applying a pressure on the two sides of the top rim to make them touch one another in the middle
- The handle of the bucket also resists approx. 28kg traction in normal usage position

Dimensions	
Capacity	14 L
Height	300 mm (±5%)
Top Diameter	300 mm (±5%)
Bottom Diameter	240 mm (±5%)
Cover	outlet of 100 mm (±10%) & clip on cap

Weight	
Bucket	630 g minimum
Cover	175 g minimum
Handle	30 g minimum
Tap (Optional)	20 g minimum

MATERIAL

CONTAINER COMPOSITION	Made of virgin or **recycled** HDPE high density polyethylene and virgin or recycled LDPE low density polyethylene
COLOR	White Bucket
COVER & HANDLE	Bright green. Other colours can be requested
TAP (OPTIONAL)	Durable plastic (HDPE) tap with turn knob, fixed to bucket through hole with locking nut

Carton Packing

21 KG	0.139 m³	1.04 x 0.43 x 0.31 m
Carton Weight (±5%)	Volume (±5%)	Packed Dimensions (±5%)

CRI Pallet

190 kg	1.40 m³	1.20 x 1.00 x 1.24 m
Pallet Weight (±5%)	Volume (±5%)	CRI Pallet Packed Dimensions (±5%)

CONTAINER LOADABILITY

Carton Packing
(20 Pcs per Carton)
20FT: 194 Cartons (3880 Pcs)
40DC: 392 Cartons (7840 Pcs)
40FT HC: 460 Cartons (9200 Pcs)

CRI Pallet
(200 Pcs packed without Carton)
20FT: 10 Pallets (2000 Pcs)
40DC: 20 Pallets (4800 Pcs)
40FT HC: 44 Pallets (8800 Pcs)

NATIONAL TENT HOUSE

PLASTIC TARPAULIN (UNHCR)




PLASTIC TARPAULIN

UNHCR STANDARD (4 X 5 M)

FEATURES

- Fire Proof, Water Proof, Rot Proof and UV resistant
- Reinforced flexible tarpaulins for temporary shelter in all climates
- Made of woven high density black polyethylene (HDPE) fibers, warp x weft, laminated on both sides with low density polyethylene (LDPE) coating

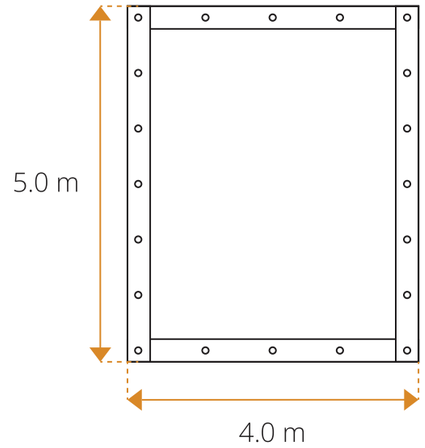

Dimensions	
Sheet Size	4 x 5 m (±1%)
Roll Size	4 x 50 m (±1%)
Weight	190 gsm (±20 grams)

MATERIAL

SHEET/ROLL COMPOSITION	Woven Polyethylene (HDPE) inner black fibers, warp x weft, laminated on both sides with LDPE coating with aluminum eyelets on 4 sides every 100 cm
Fire Retardancy	CPAI84
TENSILE STRENGTH	Min 600N both directions warp and weft (BS 2576, 50 mm grab test or equivalent)
TEAR STRENGTH	Min 100N both directions (BS 4303 wing tear or equivalent) or under ISO 4674 (A2)
UV RESISTANCE	Max. 5% loss on mechanical strength after 1500 hours UV exposure
REINFORCEMENT EYELETS	Provided with aluminum eyelets or equivalent on four sheet sides of the single sheets at 100 cm/±5 cm centre to centre, providing very strong fixation points

SHEET LOADABILITY

CRI Pallet	Non-Palletized
(20 Bales/100 Pcs per Pallet)	(5 Pcs per Bale)
20FT: 28 Pallets (2800 Pcs)	**20FT:** 660 Bales (3300 Pcs)
40DC: 60 Pallets (6000 Pcs)	**40DC:** 1300 Bales (6500 Pcs)
40HC: 60 Pallets (6000 Pcs)	**40HC:** 1300 Bales (6500 Pcs)

ROLL LOADABILITY:

CRI Pallet	Non-Palletized
(12 Bales/12 Pcs per Cage)	(1 Piece)
20FT: 28 Pallets (336 Rolls)	**20FT:** 380 Rolls
40DC: 58 Pallets (696 Rolls)	**40DC:** 710 Rolls
40FT HC: 58 Pallets (696 Rolls)	**40FT HC:** 710 Rolls

Sheet Packing

20 kg	0.044 m³	0.56 x 0.39 x 0.20 m
Bale Weight (±20%)	Volume (±20%)	Dimensions (±20%)
410 kg	1.005 m³	1.15 x 0.77 x 1.10 m
Pallet Weight (±20%)	Volume (±20%)	CRI Pallet Dimensions (±20%)

Roll Packing

36.5 kg	0.099 m³	0.78 x 0.56 x 0.18 m
Weight (±20%)	Volume (±20%)	Dimensions (±20%)
452 kg	1.005 m³	1.15 x 0.77 x 1.10 m
Pallet Weight (±20%)	Volume (±20%)	CRI Pallet Dimensions (±20%)

CPAI84 FIRE RETARDANT · WATERPROOF · ANTI-ROT · UV PROTECTION

NATIONAL TENT HOUSE


PLASTIC TARPAULIN (IFRC)



PLASTIC TARPAULIN
ICRC/IFRC/IOM STANDARD (4 X 6 M)

FEATURES

- Fire Proof, water proof, rot proof and UV resistant
- Reinforced flexible tarpaulins for temporary shelter in all climates
- Made of woven high density black polyethylene (HDPE) fibers, warp x weft, laminated on both sides with low density polyethylene (LDPE) coating

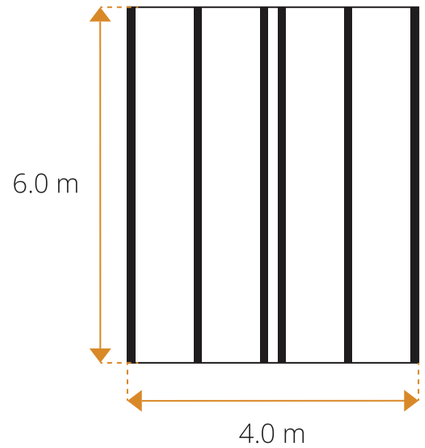

Dimensions	
Sheet Size	4 x 6 m (±1%)
Roll Size	4 x 60 m (±1%)
Weight without bands	190 gsm (±20 grams) under ISO 3801 (Min 170 to 210 gsm max)
Weight with bands	Plain sheet specific weight plus 10% additional weight for reinforcement bands under ISO 3801
Total Weight	From min 187 to 231 gsm. Specific weight of bands from min 150 to 200 gsm max

MATERIAL

SHEET	Woven HDPE black fibers fabric, double-side LDPE coating, reinforced with 6 bands of 75 mm (±3%) width, made of woven black HDPE fibers fabric and coated with grey LDPE outside. Pre-punched 8 mm holes on the 2 side bands at 0.1 m (±10%) intervals, positioned in the centre of the bands (only the reinforcement bands are pre-punched, not the tarpaulin itself)
FIRE RETARDANCY	EN13823+A1
TENSILE OF PLAIN SHEET	Min. 500 N and 15% to 25% elongation in warp and weft as per ISO 1421-1 Min
TEAR STRENGTH	Min. 100 N as per ISO 4674-1B
UV RESISTANCE	Max. 20% loss on mechanical strength after 1500 hours UV exposure
TENSILE OF REINFORCEMENT BANDS	Min 700N as per ISO 1421-1, pulling length wise in a pre-punched 8 mm hole with a hook of 8 mm wire diameter, at 200 mm from the end of the band. UV resistance 80% of original value and not less than 665N

Sheet Packing

25 kg	0.043 m³	0.60 x 0.40 x 0.18 m
Bale Weight (±10%)	Volume (±20%)	Dimensions (±20%)

CRI Pallet Packing

420 kg	1.005 m³	1.12 x 0.78 x 1.15 m
Pallet Weight (±10%)	Volume (±20%)	Dimensions (±20%)

Euro Pallet Packing

425 kg	1.105 m³	1.20 x 0.8 x 1.15 m
Pallet Weight (±10%)	Volume (±20%)	Dimensions (±20%)

CONTAINER LOADABILITY

Non-Palletized
(5 Pcs per Bale)
20FT: 520 Pallets (2600 Pcs)
40DC: 1050 Pallets (5250 Pcs)
40FT HC: 1150 Pallets (5750 Pcs)

CRI Pallet
(16 Bale (80 pcs) per Pallet)
20FT: 28 Pallets (2240 Pcs)
40DC: 60 Pallets (4800 Pcs)
40FT HC: 60 Pallets (4800 Pcs)

Euro Pallet
(16 Bale (80 pcs) per Pallet)
20FT: 22 Pallets (1760 Pcs)
40DC: 48 Pallets (3840 Pcs)
40FT HC: 48 Pallets (3840 Pcs)



NATIONAL TENT HOUSE

SLEEPING MAT




SLEEPING MAT

FEATURES

Waterproof, tear proof and material trim finish


Dimensions

Length	1.80 m
Width	0.90 m
Weight	810 g, 500 gsm (±5%)

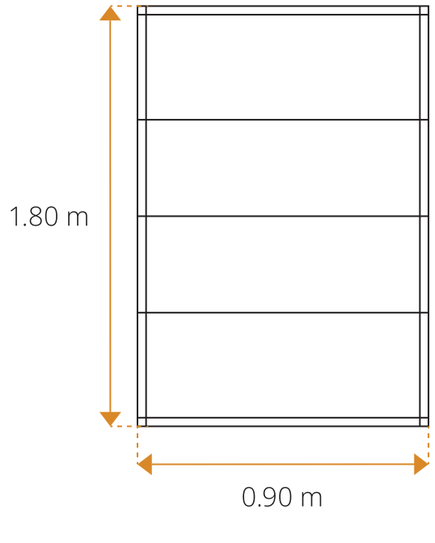

MATERIAL

COMPOSITION	Made of 100% synthetic yarns (recycled raw material) Minimum 1000 tubes in weft per meter length
YARN	Tightly woven 2/2 twill structure using a mono-lament or multi-lament warp and thick tape PP or polyester yarn in weft
COLOR	Assorted



PACKAGING

Packed in Bales

1 Bale (25 Pieces)	21 kg	0.125 cbm	0.92 x 0.40 x 0.34 m
No. of Pieces	Weight (±5%)	Volume (±5%)	Dimensions (±5%)

CRI Pallets

6 Bales (150 Pieces)	134 kg	1.005 cbm	1.12 x 0.78 x 1.15 m
No. of Pieces	Weight (±5%)	Volume (±5%)	Dimensions (±5%)

Euro Pallets

6 Bales (150 Pieces)	137 kg	1.104 cbm	1.20 x 0.80 x 1.15 m
No. of Pieces	Weight (±5%)	Volume (±5%)	Dimensions (±5%)

CONTAINER LOADABILITY

Bale Packing
20FT: 216 Bales/5400 pcs
40DC: 468 Bales/11,700 pcs
40FT HC: 546 Bales/13,650 Pcs

CRI Pallets
20FT: 28 Pallets (4200 pcs)
40DC: 60 Pallets (9000 pcs)
40FT HC: 60 Pallets (9000 pcs)

Euro Pallets
20FT: 22 Pallets (3300 Pcs)
40DC:48 Pallets (7200 Pcs)
40FT HC:48 Pallets (7200 Pcs)

WATERPROOF

NATIONAL TENT HOUSE

SHELTER TOOL KIT (IFRC TYPE)

ROPE

(1 Piece)
Polyester, diameter: 12mm, 30m, in roll color: Black/Dark Green



HANDSAW

(1 Piece)
Total length 750 mm, for Wood, Good Quality, Tempered, Hardened and Set Teeth, Unbreakable handle, Blade covered by protective cardboard



SHOVEL

(1 Piece)
Head only is hot forged carbon steel, hardened and tempered. HRC 35min to 48 max. Supply with handle. With pointed head. Total length 100 to 110 cm



HOE

(1 Piece)
Head only is 230 x 175 mm, 1.36g in forged steel, supply with varnished hard wood handle length approx, 110 - 120cm, supply blade covered by cardboard



MACHETE

Wooden handle blade sharpened for intended use supply blade covered by cardboard



SHELTER TOOL KIT
IFRC TYPE

TARPAULIN

(1 Piece)
Sheet Size: 4 x 5 m (±1%) | Roll Size: 4 x 50 m (±1%)
Total Weight: Min 187 to 231 gsm. Specific weight of bands from min 150 to 200 gsm max



TIN SNIPS

(1 Piece)
For cutting tin roofing sheet, safety latch, Good Quality



CLAW HAMMER

(1 Piece)
Weight: 0.750 kg/pc. Replaceable Wooden Handle.
Forged head, not cast. Good Quality



TIE WIRE

(1 Roll)
Diameter 2 mm. 5 mm long in roll




NAILS

(0.5 Kg Steel)
3 inches long (75x3 mm), to be supplied in sealed bag



ROOFING NAILS

(0.5 Kg)
Capped, with attached rubber washer 75 mm x 3 mm (3"), twisted and galvanized preferred, to e supplied in sealed bag



NATIONAL TENT HOUSE

HYGIENE KIT



LIST OF ITEMS

- PVC fabric bag
- Towel
- Shampoo
- Shower gel
- Dental kit (toothbrush and toothpaste)
- Water Jug (Lota)
- Plastic Mug
- Soap
- Shaving kit
- Sanitary pads
- Comb
- Lice Comb
- Cotton Flannel Cloth

CUSTOMIZATION AVAILABLE OR REQUEST

NON STANDARD ITEMS

TOWEL



Size: 70 x 40 cm
Weight: 95 g (±5%)
Material: 100% Cotton

Packing: Packed in a carton box

SLEEPING BAG



Size: 210 x 85 cm
Weight: 1.5Kg (±10%)

Material:
Outer: 100% 190T- Water Repellent Polyester
Inner: Polyester 65%, cotton 35%
Fill: 350gsm Polyester

Packing: Compressed and Vacuumed in a PE bag which is then packed in a carton

MATTRESS



Size:
Option 1: 190 x 70 cm
Option 2: 190 x 90 cm
Thickness: 10-12 cm
Weight: 4.1-4.5 Kg (±5%)

Material:
Cover: 100% cotton, removable via zipper
Foam: 100% Polyester

Packing: Rolled and Vacuum packed in PE bag

PILLOW



Size: 50 x 70 cm
Weight: 0.5 Kg (±5%)

Material:
Cover: PP Non-Woven - 40gsm.
Filling: Foam.

Packing: Vacuum packed in PE bag

STEEL FIELD COD



Size: 190 x 64 x 42 cm
Weight: 6.2 Kg (±10%)

Material:
Frame: Steel Tubes.
Deck: Polyester with PVC coating.

Packing: Packed in carton

NON STANDARD ITEMS

NATIONAL TENT HOUSE

BUNK BED



Bed Size: 190 x 90 cm
Weight: 43-44 Kg (±5%)

Material: Powder coated, steel tubes, Galvanized nuts and bolts

Packing: Packed in Carton

BED LINEN



Bed Sheet (x2)
Size: 145 x 210 cm
Material: Poly Cotton (50:50)

Packing: Packed in a bale or a carton box

Pillow Cover (x1)
Size: 145 x 210 cm
Material: Poly Cotton (50:50)

Packing: Packed in a bale or a carton box

QUILT



Option A - Synthetic quilt for single person
Size: 140 x 200 cm
Weight: 1.15 - 1.3 Kg (±5%)

Material:
Cover:
Option 1: 100% Polyester Microfiber - 75 gsm
Option 2: Non-Woven Polypropylene - 45 gsm
Filling: 100% Polyester Wadding - 300 gsm

Packing: Rolled in PE Foil, packed in a carton box

Option B - Suitable for cold climates
Size: 155 x 215 cm
Weight: 2 kg (±5%)

Material:
Cover: Non-Woven Polypropylene - 45 gsm
Filling: 100% Polyester 500 gsm

Packing: Rolled in PE Foil, packed in a carton box